


2012 ANNUAL REPORT
to the
GOVERNMENTS OF CANADA, UNITED STATES,
SASKATCHEWAN AND MONTANA

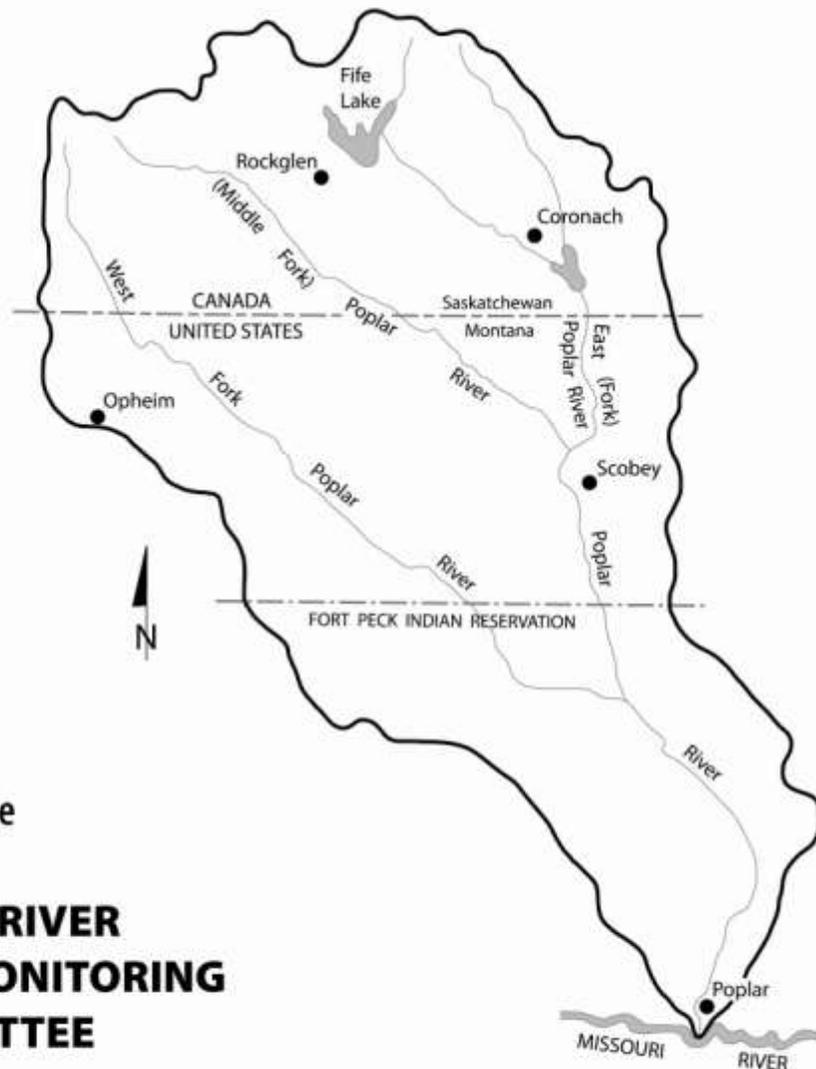

by the

**POPLAR RIVER
BILATERAL MONITORING
COMMITTEE**

COVERING CALENDAR YEAR 2012

June 2013

Poplar River Bilateral Monitoring Committee

Department of State
Washington, D.C., United States

Governor's Office
State of Montana
Helena, Montana, United States

Department of Foreign Affairs
and International Trade Canada
Ottawa, Ontario, Canada

Water Security Agency
Moose Jaw, Saskatchewan, Canada

Ladies and Gentlemen:

Herein is the 31th Annual Report of the Poplar River Bilateral Monitoring Committee. This report discusses the Committee activities of 2012 and presents the Technical Monitoring Schedules for the year 2013.

During 2012, the Poplar River Bilateral Monitoring Committee continued to fulfill the responsibilities assigned by the governments under the Poplar River Cooperative Monitoring Agreement dated September 23, 1980. Through exchange of Diplomatic Notes, the Arrangement was extended in March 1987, July 1992, July 1997, March 2002, April 2007, and March 2012. The Monitoring Committee is currently extended to March 2017.

The enclosed report summarizes current water-quality conditions and compares them to guidelines for specific parameter values that were developed by the International Joint Commission (IJC) under the 1977 Reference from Canada and the United States. After evaluation of the monitoring information for 2012, the Committee finds that the measured conditions meet the recommended objectives.

Based on IJC recommendations, the United States was entitled to an on-demand release of 1,230 dam³ (1,000 acre-feet) from Cookson Reservoir during 2012. A volume of 2,180 dam³ (1,770 acre-feet), in addition to the minimum flow, was delivered to the United States between May 1 and May 31, 2012. In addition, daily flows in 2012 met or exceeded the minimum flow recommended by the IJC except for June 5 and 6.

During 2012, monitoring continued in accordance with Technical Monitoring Schedules outlined in the 2011 Annual Report of the Poplar River Bilateral Monitoring Committee.


Yours sincerely,




John M. Kilpatrick
Chairman, United States Section



Tim Davis
Member, United States Section



Mike Renouf
Chairman, Canadian Section



Kei Lo
Member, Canadian Section

TABLE OF CONTENTS

Highlights for 2012.....	iii
1.0 Introduction.....	1
2.0 Committee Activities.....	2
2.1 Membership.....	2
2.2 Meetings.....	2
2.3 Review of Water-Quality Objectives.....	3
2.4 Data Exchange.....	4
2.5 Water-Quality Monitoring Responsibilities.....	4
3.0 Water and Air: Monitoring and Interpretations.....	6
3.1 Poplar River Power Station Operation.....	6
3.2 Surface Water.....	6
3.2.1 Streamflow.....	6
3.2.2 Apportionment.....	7
3.2.3 Minimum Flows.....	8
3.2.4 On-Demand Release.....	9
3.2.5 Surface-Water Quality.....	10
3.2.5.1 Total Dissolved Solids.....	11
3.2.5.2 Boron.....	14
3.2.5.3 Other Water-Quality Objectives.....	17
3.3 Ground Water.....	19
3.3.1 Operations-Saskatchewan.....	19
3.3.2 Ground-Water Monitoring.....	21
3.3.2.1 Saskatchewan.....	21
3.3.2.2 Montana.....	23
3.3.3 Ground-Water Quality.....	25
3.3.3.1 Saskatchewan.....	25
3.3.3.2 Montana.....	28
3.4 Cookson Reservoir.....	29
3.4.1 Storage.....	29
3.4.2 Water Quality.....	31
3.5 Air Quality.....	32
3.6 Quality Control.....	32
3.6.1 Streamflow.....	32
3.6.2 Water Quality.....	32
 ANNEXES	
1.0 Poplar River Cooperative Monitoring Arrangement, Canada-United States.....	A1
2.0 Poplar River Cooperative Monitoring Arrangement, Technical Monitoring Schedules, 2013, Canada-United States.....	A2
3.0 Recommended Flow Apportionment in the Poplar River Basin.....	A3
4.0 Conversion Factors.....	A4

TABLES

Table 2.1	Water-Quality Objectives	5
Table 3.1	Recommended Water-Quality Objectives and Excursions, 2012 Sampling Program, East Poplar River at International Boundary	18
Table 3.2	Geologic Formation Name Equivalence between Saskatchewan and Montana.....	21
Table 3.3	Water-Quality Statistics for Water Pumped from Supplementary Water Supply Project Wells.....	25
Table 3.4	Water-Quality Statistics for Water Pumped from Soil Salinity Project Wells Sampled at the Discharge Pipe	26
Table 3.5	Cookson Reservoir Storage Statistics for 2012	29

FIGURES

Figure 3.1	Monthly Mean Discharge During 2012 as Compared with the Median Monthly Mean Discharge from 1931-2011 for the Poplar River at International Boundary	7
Figure 3.2	Flow Hydrograph of the East Poplar River at International Boundary	8
Figure 3.3	Cumulative Volume Hydrograph of On-Demand Release	9
Figure 3.4	Estimated March to October Monthly TDS Concentration During 2012 for East Poplar River at International Boundary	12
Figure 3.5	Discrete Sample and Three-Month Moving Flow-Weighted Average Estimated TDS Concentrations for East Poplar River at International Boundary	12
Figure 3.6	Five-Year Moving Flow-Weighted Average TDS Concentration for East Poplar River at International Boundary (Statistically Estimated).....	13
Figure 3.7	Daily TDS Concentration (Statistically Estimated), Calendar Years 1993 to 2012, for East Poplar River at International Boundary	13
Figure 3.8	Estimated March to October Monthly Boron Concentrations During 2012 for East Poplar River at International Boundary	15
Figure 3.9	Discrete Sample and Three-Month Moving Flow-Weighted Average Estimated Boron Concentrations for East Poplar River at International Boundary	15
Figure 3.10	Five-Year Moving Flow-Weighted Average Estimated Boron Concentration for East Poplar River at International Boundary (Statistically Estimated).....	16
Figure 3.11	Daily Boron Concentration (Statistically Estimated), Calendar Years 1993 to 2012, for East Poplar River at International Boundary	16
Figure 3.12	Annual Pumpage by the Poplar River Power Station's Supplementary Water Supply ..	19
Figure 3.13	Annual Pumpage from Soil Salinity Project.....	20
Figure 3.14	Hydrograph of Selected Wells Completed in the Hart Coal Seam.....	22
Figure 3.15	Hydrograph of Selected Wells - Hart Coal Aquifers	23
Figure 3.16	Hydrograph of Selected Wells - Alluvium and Fox Hills/Hell Creek Aquifers	24
Figure 3.17	Total Dissolved Solids in Samples from Montana Wells	28
Figure 3.18	Cookson Reservoir Daily Mean Water Levels for 2012 and Median Daily Water Levels, 2002-2011.....	30
Figure 3.19	Cookson Reservoir Daily Mean Water Storage for 2012 and Median Daily Storage, 2002-2011	31
Figure 3.20	Reservoir Volume and Total Dissolved Solids Concentrations from 1979-2012 for Cookson Reservoir.....	32

HIGHLIGHTS FOR 2012

The Poplar River Power Station completed its twenty-eighth full year of operation in 2012. The two 300-megawatt coal-fired units generated 4,647,928 gross megawatts (MW) of electricity. The average capacity factors for Units No. 1 and 2 were 84.8 percent and 83.1 percent, respectively. The capacity factors are based on the maximum generating rating of 315 MW/hour for both Unit No. 1 and Unit No. 2. The scheduled maintenance outage for Unit 1 and 2 were completed in the spring and fall of 2012 so as not to coincide with system peak demand periods that occur over the summer and winter periods.

Monitoring information collected in both Canada and the United States during 2012 was exchanged in the spring of 2013.

The recorded volume of the Poplar River at International Boundary from March 1 to May 31, 2012 was 10,870 dam³ (8,810 acre-feet). Based on IJC recommendations and the assumption that the recorded flow is the natural flow, the United States was entitled to a minimum discharge on the East Poplar River of 0.085 cubic metres per second (m³/s) (3.0 cubic feet per second (ft³/s)) for the period June 1, 2012 to August 31, 2012, and 0.057 m³/s (2.0 ft³/s) for the period September 1, 2012 to May 31, 2013. The minimum entitled flow for the period January 1 to May 31, 2012 was 0.057 m³/s (2.0 ft³/s), determined on the basis of the Poplar River flow volume for March 1 to May 31, 2011.

Daily flows during 2012 met or exceeded the minimum flow recommended by the IJC during the year except for June 5 and 6.

In addition to the minimum flow, the IJC apportionment recommendation entitles Montana to an on-demand release to be delivered in the East Poplar River during the twelve-month period commencing June 1. Based on the March 1 to May 31, 2011 runoff volume of 28,510 dam³ (23,110 acre-feet) recorded at the Poplar River at International Boundary gauging station, Montana was entitled to an additional release of 1,230 dam³ (1,000 acre-feet) from Cookson Reservoir during the succeeding twelve-month period commencing June 1, 2011. Montana requested this release to be made between May 1 and May 31, 2012. A volume of 1,280 dam³ (1,040 acre-feet), in addition to the minimum flow, was delivered during this period.

The 2012 five-year estimated flow-weighted TDS concentrations were below the long-term objective of 1,000 milligrams per litre (mg/L). The maximum monthly five-year estimated flow-weighted concentration value in 2012 was about 817 mg/L. The 2012 five-year estimated flow-weighted boron concentrations remained well below the long-term objective of 2.5 mg/L.

This page intentionally left blank

1.0 INTRODUCTION

The Poplar River Bilateral Monitoring Committee was authorized for an initial period of five years by the Governments of Canada and the United States under the Poplar River Cooperative Monitoring Arrangement dated September 23, 1980. A copy of the Arrangement is attached to this report as Annex 1. Through exchange of Diplomatic Notes, the Arrangement was extended in March 1987, July 1992, July 1997, March 2002, April 2007 and March 2012. The Monitoring Committee is currently extended to March 2017. A more detailed account of the historical background of the Monitoring Arrangement is contained in the 1990 Annual Report of the Poplar River Bilateral Monitoring Committee.

The Committee oversees monitoring programs designed to evaluate the potential for transboundary impacts from SaskPower's (formerly Saskatchewan Power Corporation) coal-fired thermal generating station and ancillary operations near Coronach, Saskatchewan. Monitoring is conducted in Canada and the United States at or near the International Boundary for quantity and quality of surface and ground water and for air quality. Participants from both countries, including Federal, State and Provincial agencies, are involved in monitoring.

The Committee submits an annual report to Governments which summarizes the monitoring results, evaluates apparent trends, and compares the data to objectives or standards recommended by the International Joint Commission (IJC) to Governments, or relevant State, Provincial, or Federal standards. The Committee reports to Governments on a calendar year basis. The Committee is also responsible for drawing to the attention of Governments definitive changes in monitored parameters which may require immediate attention.

A responsibility of the Committee is to review the adequacy of the monitoring programs in both countries and make recommendations to Governments on the Technical Monitoring Schedules. The Schedules are updated annually for new and discontinued programs and for modifications in sampling frequencies, parameter lists, and analytical techniques of ongoing programs. The Technical Monitoring Schedules listed in the annual report (Annex 2) are given for the year 2013. The Committee will continue to review and propose changes to the Technical Monitoring Schedules as information requirements change.

2.0 COMMITTEE ACTIVITIES

2.1 Membership

The Committee is composed of representatives of the Governments of the United States of America and Canada, the State Government of Montana, and the Provincial Government of Saskatchewan. In addition to the representatives of Governments, two ex-officio members serve as local representatives for the State of Montana and Province of Saskatchewan.

During 2012, the members of the Committee included: Mr. J. Kilpatrick, U.S. Geological Survey, United States representative and Co-chair; Mr. M. Renouf, Environment Canada, Canadian representative and Co-chair; Mr. Tim Davis, Montana Department of Natural Resources and Conservation, Montana representative; Mr. G. Adilman, Saskatchewan Ministry of Environment, Saskatchewan representative; and Mr. D. Kirby, Reeve, R.M. of Hart Butte, Saskatchewan local ex-officio representative. The Montana local ex-officio representative position was vacant in 2012.

2.2 Meetings

The Committee met via a conference call on June 24, 2012. Delegated representatives of Governments, with the exception of the ex-officio members from Montana and Saskatchewan, participated in the meeting. In addition to Committee members, several technical advisors representing Federal, State, and Provincial agencies also participated. Committee members reviewed the operational status of the Poplar River Power Station and associated coal-mining activities; examined data collected in 2011 including surface-water quality and quantity, ground-water quality and quantity, and air quality; discussed proposed changes in the water-quality sampling program; and established the Technical Monitoring Schedules for the year 2013.

2.3 Review of Water-Quality Objectives

The International Joint Commission in its Report to Governments, titled “Water Quality in the Poplar River Basin,” recommended that the Committee periodically review the water-quality objectives within the overall Basin context and recommend new and revised objectives as appropriate. In 1991, an action item from the annual Committee meeting set in motion the review and revision of the water-quality objectives.

In 1993, the Committee approved changes in water-quality objectives recommended by the subcommittee that was formed in 1992 to review the objectives. The Committee also discussed the water-quality objectives for 5-year and 3-month flow-weighted concentrations for total dissolved solids and boron. Although the Committee agreed that calculation procedures to determine flow-weighted concentrations are time consuming and probably scientifically questionable, no consensus was reached on alternative objectives or procedures.

In 1997, the Committee agreed to suspend the monitoring and reporting of several parameters. The parameters affected were: dissolved aluminum, un-ionized ammonia, total chromium, dissolved copper, mercury in fish tissues, fecal coliform, and total coliform. The Committee also agreed to other minor revisions for clarification purposes; for example, changing the designation for pH from “natural” to “ambient”.

In 1999, the Committee replaced the term “discontinued” with “suspended” in Table 2.1.

In 2001, the Committee suspended the monitoring of dissolved mercury and total copper. This decision was based on data indicating concentrations or levels well below or within the objectives. Current objectives approved by the Committee are listed in Table 2.1.

The Committee also agreed to periodically review all parameters for which monitoring has been suspended.

Another responsibility of the Committee has included an ongoing exchange of data acquired through the monitoring programs. Exchanged data and reports are available for public viewing at the agencies of the participating governments or from Committee members.

2.4 Data Exchange

The Committee is responsible for assuring exchange of data between governments. The exchange of monitoring information was initiated in the first quarter of 1981 and was an expansion of the informal quarterly exchange program initiated between the United States and Canada in 1976. Until 1991, data were exchanged quarterly. At the request of the Committee, the United States and Canada agreed to replace the quarterly exchange of data with an annual exchange effective at the beginning of the 1992 calendar year. Henceforth, data will be exchanged once each year as soon after the end of the calendar year as possible. However, unusual conditions or anomalous data will be reported and exchanged whenever warranted. No unusual conditions occurred during 2012 which warranted special reporting.

2.5 Water-Quality Monitoring Responsibilities

Environment Canada has agreed to take responsibility for repairing the continuous water-quality monitor installed at the East Poplar station at the International Boundary. The continuous water-quality monitor records daily specific conductance values which are used in the computation of TDS and boron values to monitor water quality in the East Poplar River. In the absence of regular monthly water-quality samples, the Committee has agreed to utilize the data collected by the continuous water-quality monitor for its surface-water-quality monitoring program.

The USGS, in cooperation with the Fort Peck Tribes, previously collected water-quality samples four times per year to supplement the daily specific conductance data collected by the continuous water-quality monitor.

Table 2.1 Water-Quality Objectives

Parameter	Original Objective	Recommendation	Current Objective
Boron, total	3.5/2.5 ¹	Continue as is	3.5/2.5 ¹
TDS	1,500/1,000 ¹	Continue as is	1,500/1,000 ¹
Aluminum, dissolved	0.1	Suspended*	---
Ammonia, un-ionized	0.02	Suspended*	---
Cadmium, total	0.0012	Continue as is	0.0012
Chromium, total	0.05	Suspended*	---
Copper, dissolved	0.005	Suspended*	---
Copper, total	1	Suspended*	---
Fluoride, dissolved	1.5	Continue as is	1.5
Lead, total	0.03	Continue as is	0.03
Mercury, dissolved	0.0002	Suspended*	---
Mercury, fish (mg/kg)	0.5	Suspended*	---
Nitrate	10	Continue as is	10
Oxygen, dissolved	4.0/5.0 ²	Objective applies only during open water	4.0/5.0 ²
SAR (units)	10	Continue as is	10
Sulfate, dissolved	800	Continue as is	800
Zinc, total	0.03	Continue as is	0.03
Water temperature (C)	30.0 ³	Continue as is	30.0 ³
pH (units)	6.5 ⁴	Continue as is	6.5 ⁴
Coliform (no./100 mL)			
Fecal	2,000	Suspended*	---
Total	20,000	Suspended*	---
<p>Units in mg/L except as noted.</p> <p>1. Five-year average of flow-weighted concentrations (March to October) should be <2.5 boron, <1,000 TDS. Three-month average of flow-weighted concentration should be <3.5 boron and <1,500 TDS.</p> <p>2. 5.0 (minimum April 10 to May 15), 4.0 (minimum remainder of year - Fish Spawning).</p> <p>3. Natural temperature (April 10 to May 15), <30 degree Celsius (remainder of year)</p> <p>4. Less than 0.5 pH units above ambient, minimum pH=6.5.</p>			

*Suspended after review of historic data found sample concentrations consistently below the objective. The Committee will periodically review status of suspended objectives.

3.0 WATER AND AIR: MONITORING AND INTERPRETATIONS

3.1 Poplar River Power Station Operation

Saskatchewan Power Corporation (SaskPower) operates the Poplar River Power Station near the town of Coronach, Saskatchewan. The Poplar River Power Station is comprised of two lignite-burning power generating units designated Unit No. 1 and Unit No. 2. Both Unit No. 1 and Unit No. 2 have a maximum generating rating of 315 MW/hour and share a common 122 metres (m) (400 feet (ft)) tall stack.

In 2012 both units were operated as base load units supplying the maximum production except when system constraint and outages dictated otherwise. The scheduled maintenance outages for Unit No. 1 and Unit No. 2 were completed in the spring and fall of 2012 so as not to coincide with system peak demand periods that occur over the summer and winter periods.

Between January 1 and December 31, Poplar River Power Station generated 4,647,928 gross MW of electricity. During this time approximately 3,485,352 tonnes (3,841,903 tons) of coal and 2,333 m³ (616,379 gallons) of fuel oil were consumed. The average capacity factors for Unit No. 1 and Unit No. 2 were 84.8 percent and 83.1 percent respectively.

3.2 Surface Water

3.2.1 Streamflow

Streamflow in the Poplar River basin was above normal in 2012. The March to October recorded flow of the Poplar River at International Boundary, an indicator of natural flow in the basin, was 14,020 cubic decametres (dam³) (11,370 acre-feet), which was 139 percent of the 1931-2011 median seasonal flow of 10,070 dam³ (8,160 acre-feet). A comparison of 2012 monthly mean discharge with the 1931-2011 median monthly mean discharge is shown in Figure 3.1.

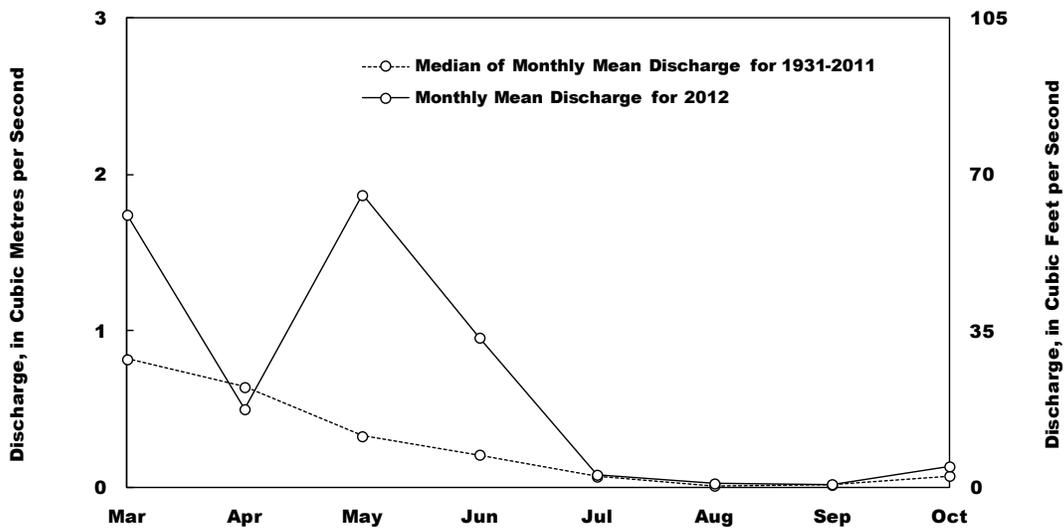


Figure 3.1 Monthly Mean Discharge During 2012 as Compared with the Median Monthly Mean Discharge from 1931-2011 for the Poplar River at International Boundary.

The 2012 recorded flow volume of the East Poplar River at International Boundary was 4,880 dam³ (3,960 acre-feet). This volume is 177 percent of the median annual flow of 2,750 dam³ (2,230 acre-feet) for 1976-2011 (since the completion of Morrison Dam).

3.2.2 Apportionment

In 1976 the International Souris-Red Rivers Engineering Board, through its Poplar River Task Force, completed an investigation and made a recommendation to the Governments of Canada and the United States regarding the apportionment of waters of the Poplar River basin. Although the recommendations have not been officially adopted, the Province of Saskatchewan has adhered to the apportionment recommendations. Annex 3 contains the apportionment recommendation.

3.2.3 Minimum Flows

The recorded volume of the Poplar River at International Boundary from March 1 to May 31, 2012 was 10,870 dam³ (8,810 acre-feet). Based on IJC recommendations and the assumption that the recorded flow is the natural flow, the United States was entitled to a minimum discharge on the East Poplar River of 0.085 cubic metres per second (m³/s) (3.0 cubic feet per second (ft³/s)) for the period June 1, 2012 to August 31, 2012, and 0.057 m³/s (2.0 ft³/s) for the period September 1, 2012 to May 31, 2013. The minimum entitled flow for the period January 1 to May 31, 2012 was 0.057 m³/s (2.0 ft³/s), determined on the basis of the Poplar River flow volume for March 1 to May 31, 2011. A hydrograph for the East Poplar River at International Boundary and the minimum flow as recommended by the IJC are shown in Figure 3.2.

Daily flows during 2012 met or exceeded the minimum flow recommended by the IJC during the year except for June 5 and 6.

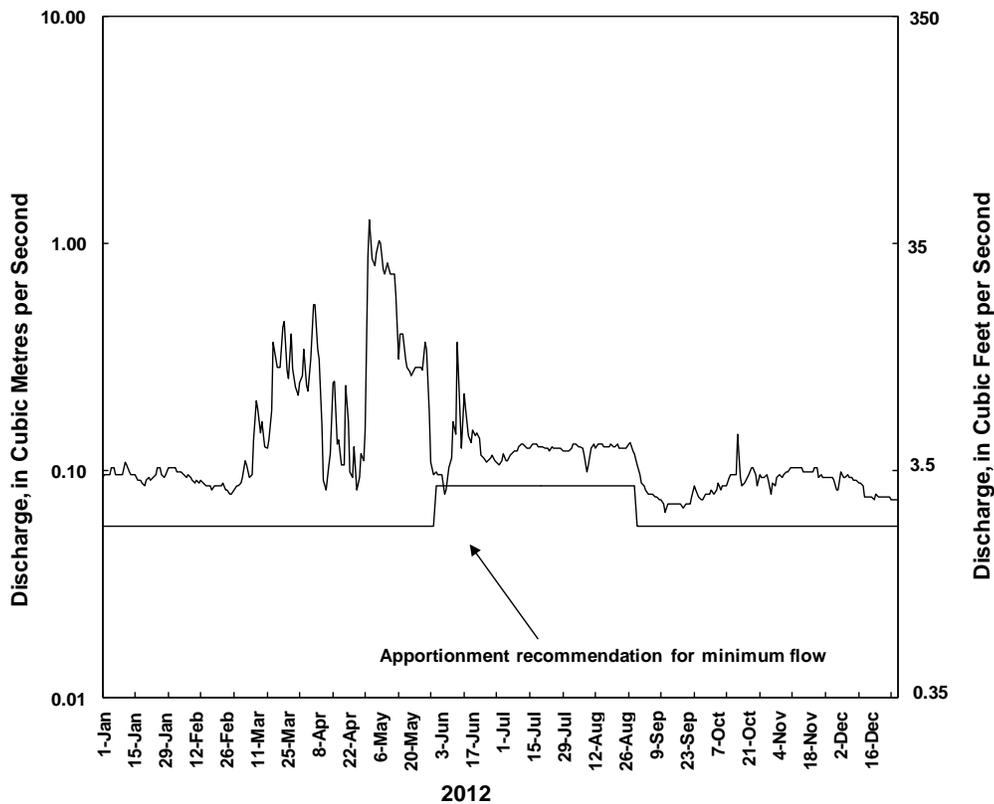


Figure 3.2 Flow Hydrograph of the East Poplar River at International Boundary.

3.2.4 On-Demand Release

In addition to the minimum flow, the IJC apportionment recommendation entitles Montana to an on-demand release to be delivered in the East Poplar River during the twelve-month period commencing June 1. Based on the March 1 to May 31, 2011 runoff volume of 28,510 dam³ (23,110 acre-feet) recorded at the Poplar River at International Boundary gauging station, Montana was entitled to an additional release of 1,230 dam³ (1,000 acre-feet) from Cookson Reservoir during the succeeding twelve-month period commencing June 1, 2011. Montana requested this release to be made between May 1 and May 31, 2012. A volume of 1,280 dam³ (1,040 acre-feet), in addition to the minimum flow, was delivered during this period. A hydrograph showing cumulative volume of the on-demand release request and on-demand release delivery made at the East Poplar River at International Boundary is shown in Figure 3.3.

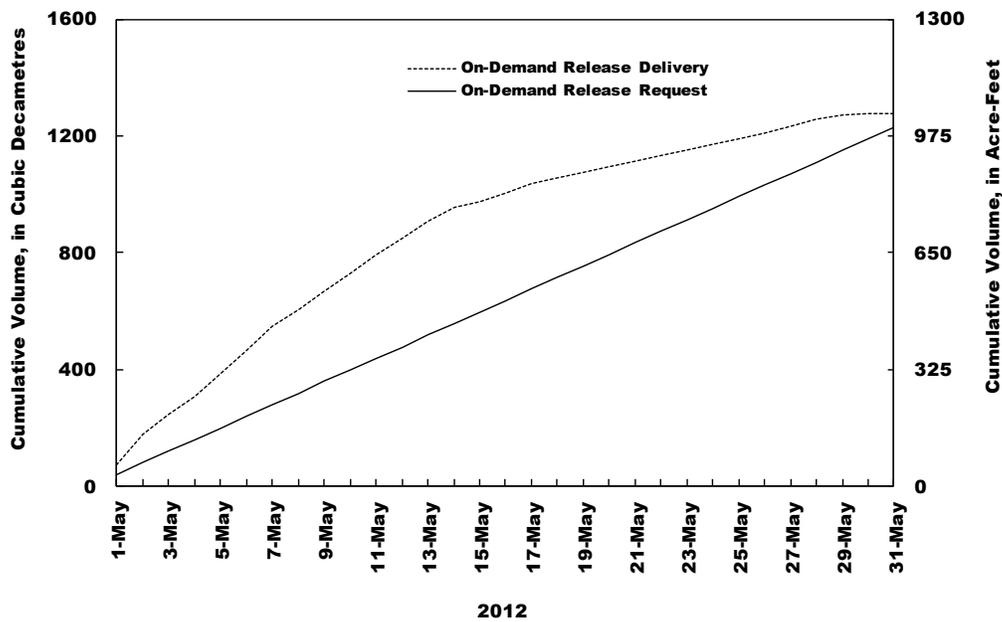


Figure 3.3 Cumulative Volume Hydrograph of On-Demand Release.

3.2.5 Surface-Water Quality

The 1981 report by the IJC to Governments recommended:

For the March to October period, the maximum flow-weighted concentrations should not exceed 3.5 milligrams per litre (mg/L) for boron and 1,500 mg/L for TDS for any three consecutive months in the East Poplar River at the International Boundary. For the March to October period, the long-term average of flow-weighted concentrations should be 2.5 mg/L or less for boron, and 1,000 mg/L or less for TDS in the East Poplar River at the International Boundary.

For the period prior to 1982, the three-month moving flow-weighted concentration (FWC) for boron and total dissolved solids (TDS) was calculated solely from monthly water-quality monitoring results. In 2003, the Poplar River Bilateral Monitoring Committee decided to suspend much of the water-quality sampling program until it is warranted again. All surface-water-quality sample collection by Environment Canada has been suspended at the East Poplar River boundary station. After the monthly discrete sampling program was suspended in 2003, the USGS continued to collect four discrete samples per year until 2010, when due to a lack of funding no samples were obtained.

Since the beginning of 1982, the USGS has monitored specific conductance daily in the East Poplar River at the International Boundary, making it possible to estimate boron and TDS concentrations using a linear regression relationship with specific conductance. Thus, the three-month FWC for boron and TDS for the period 1982 to 2002 was calculated from the results of monthly monitoring (discrete water-quality samples collected by both Canada and the United States) or from estimated monthly water-quality data based upon daily specific conductance data collected by the USGS during months when a discrete water-quality sample was not available.

Since 2003, the Committee has agreed to use the continuous data collected by the specific-conductance monitor as a surrogate for the monthly water-quality sampling program. Hence, the three-month FWC for TDS and boron in 2012 were calculated using the two equations (shown later in text) and the continuous specific-conductance data collected at the East Poplar River at the International Boundary.

The Bilateral Monitoring Committee adopted the approach that, for the purpose of comparison with the proposed IJC long-term objectives, the boron and TDS data are best plotted as a five-year moving FWC which is advanced one month at a time.

Prior to 1988, long-term averages were calculated for a five-year period in which 2.5 years preceded and 2.5 years followed each plotted point. Beginning in 1988, the FWC was calculated from the 5-year period preceding each plotted point. For example, the FWC for December 2012 is calculated from data generated over the period December 2006 to December 2012. The calculations are based on the results of samples collected throughout the year, and are not restricted to only those collected during the months bracketing the period of irrigation (March to October) each year.

3.2.5.1 Total Dissolved Solids

TDS is inversely related to streamflow at the East Poplar River at the International Boundary station. During periods of high runoff such as spring freshet, TDS decreases as the proportion of streamflow derived from ground water decreases. Conversely, during times of low streamflow (late summer, winter) the contribution of ground water to streamflow is proportionally greater. Because the ground water entering the river has a higher ionic strength than the surface water, the TDS of the stream increases markedly during low-flow conditions.

The March to October estimated monthly TDS concentrations during 2012 for East Poplar River at the International Boundary are shown in Figure 3.4. The estimated monthly TDS concentrations during this period ranged from 634 mg/L (May) to 887 mg/L (October). Estimated daily TDS concentrations during the 2012 calendar year ranged from 588 mg/L (May 2) to 1195 mg/L (December 9-11).



The three-month moving FWC for TDS for the period of 1992-2012 is presented in Figure 3.5. The short-term TDS objective has not been exceeded during the period of record.



The five-year moving estimated FWC for TDS (Figure 3.6) did not exceed the long-term objective of 1,000 mg/L in 2012. The maximum monthly five-year estimated FWC in 2012 was about 817 mg/L, down significantly from values prior to May 2011.

The daily TDS values, as estimated by linear regression from the daily specific-conductance readings, for the period January 1993 through December 2012 are shown in Figure 3.7. The figure shows an abrupt drop in estimated TDS corresponding to the snowmelt runoff occurring during the spring of each year.

The relationship between TDS and specific conductance based upon data collected during the March to October period from 1974 to 2009 is as follows:

$$\text{TDS} = (0.624613813 \times \text{specific conductance}) + 35.1841527$$
$$(\text{R}^2 = 0.89, \text{n} = 363)$$

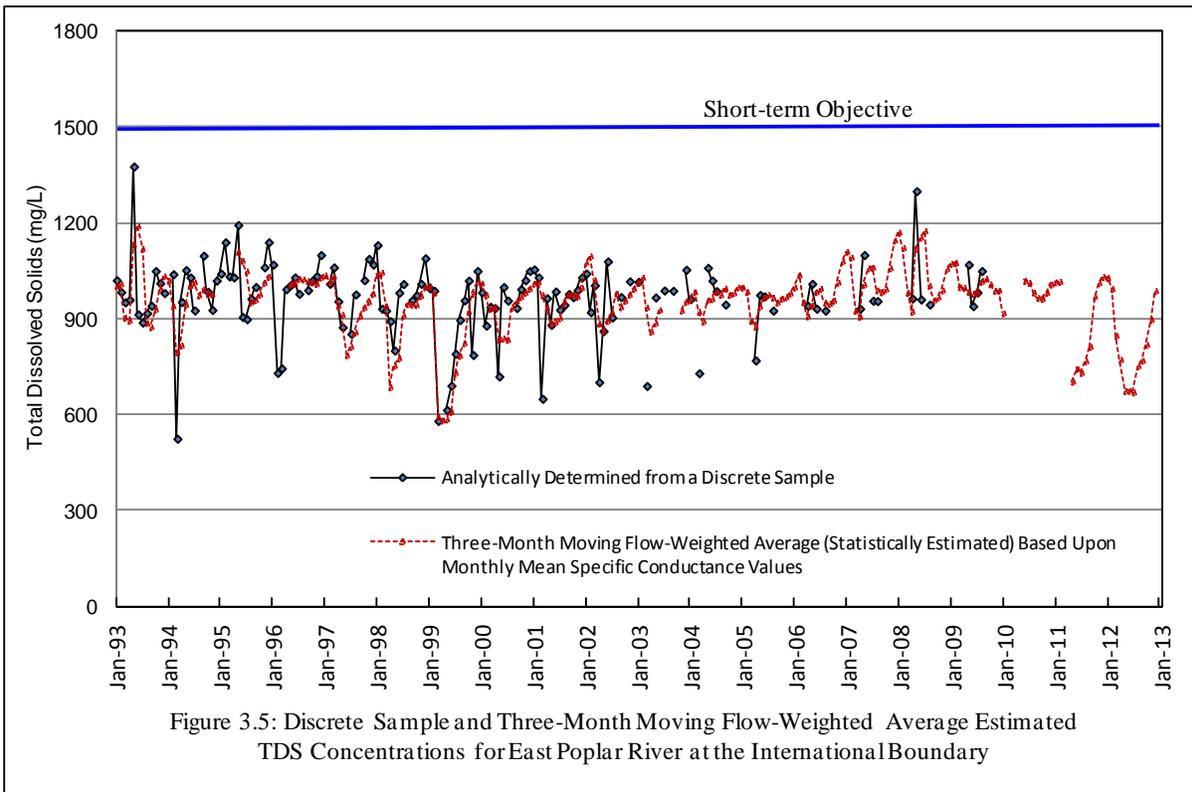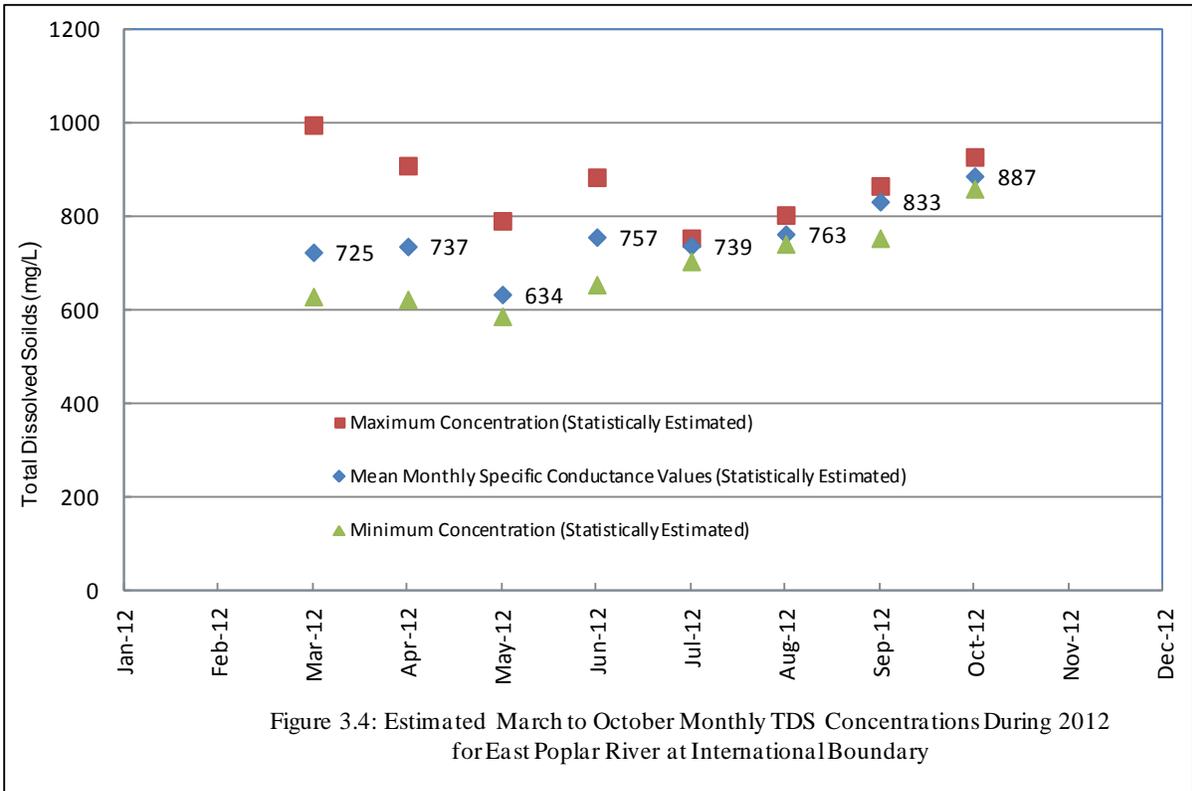

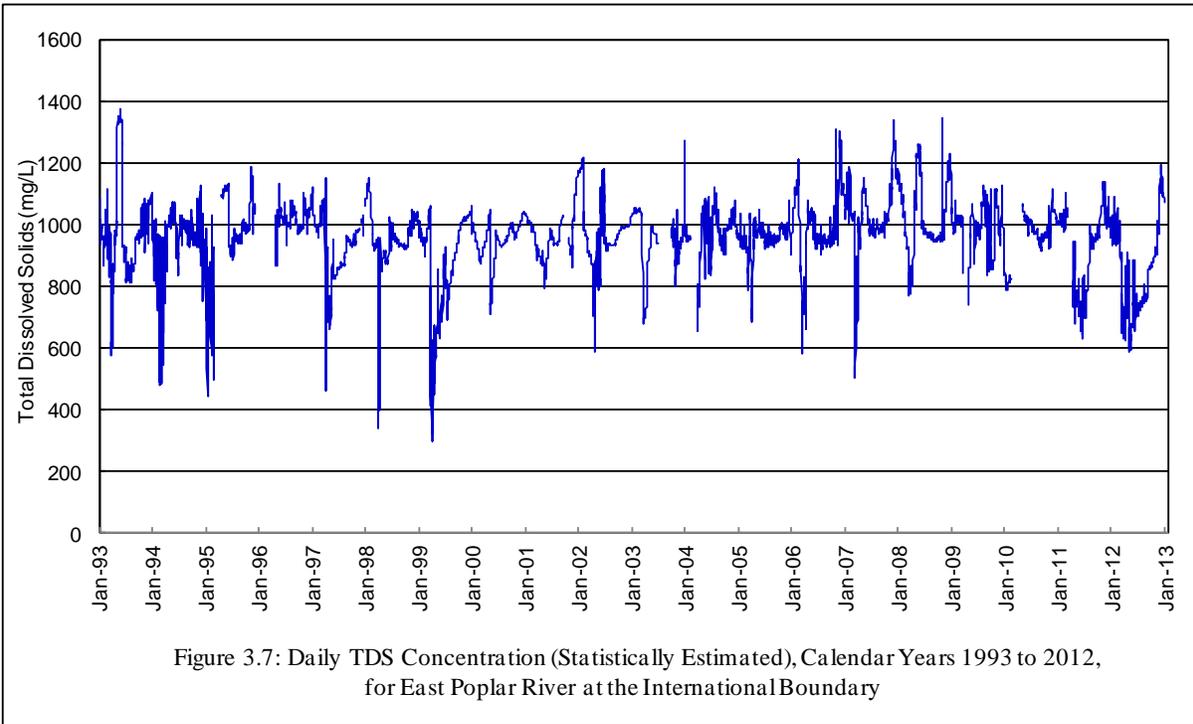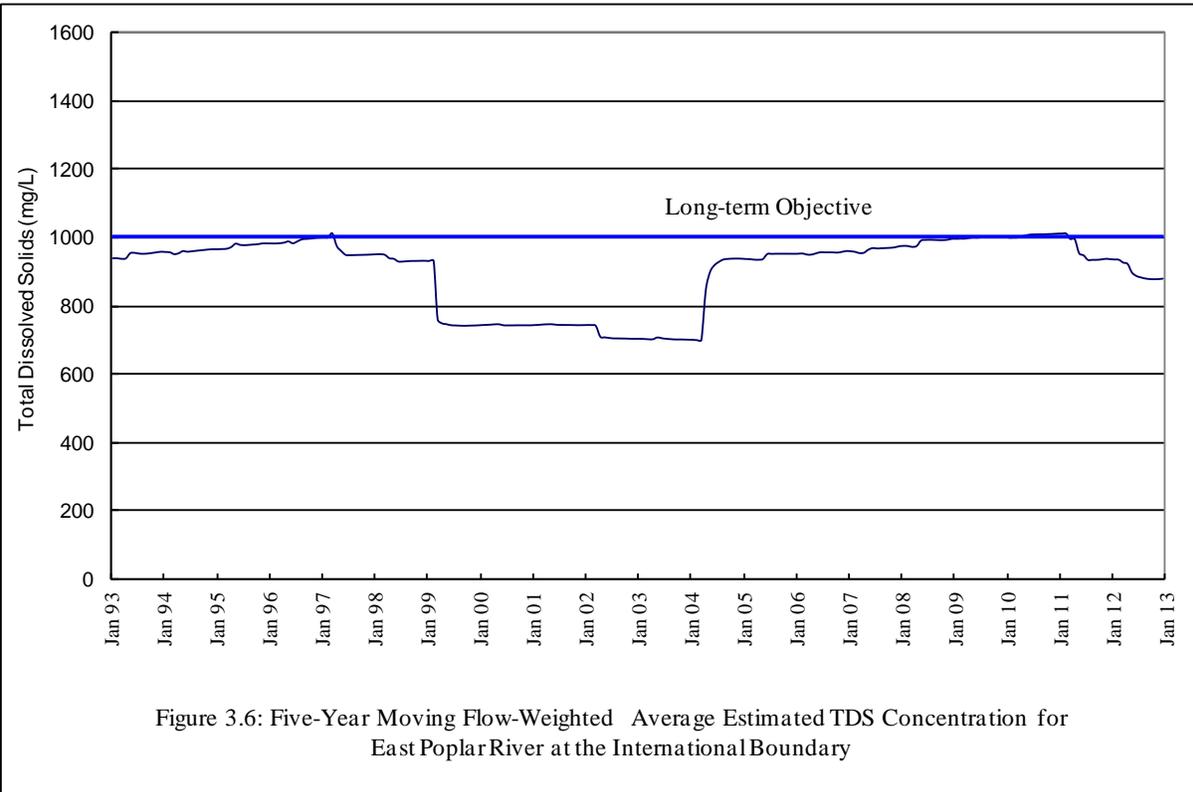

3.2.5.2 Boron

All the boron concentrations presented below were estimated using the boron equation that was developed from water-quality samples collected during the months March through October from 1974-2003 and the daily specific conductance data collected by the specific-conductance monitor.

The March to October estimated monthly boron concentrations during 2012 for East Poplar River at the International Boundary are shown in Figure 3.8. The estimated monthly boron concentrations during this period ranged from 1.20 mg/L (May) to 1.73 mg/L (October). Estimated daily boron concentrations during the 2012 calendar year ranged from 1.10 mg/L (May 2) to 2.38 mg/L (December 9-11).

The 3-month flow-weighted concentration (FWC) for boron for the period of 1993-2012 is shown in Figure 3.9. The short-term objective of 3.5 mg/L has not been exceeded during the period of record.

The 5-year moving FWC for boron (Figure 3.10) remained well below the long-term objective of 2.5 mg/L during 2012.

Boron concentrations are not as well-correlated with specific conductance as TDS. Boron is a relatively minor ion, and does not in itself contribute to a large degree to the total load of dissolved constituents in the water. Accordingly, it appears likely that the standard deviation of dissolved boron (relative to the long-term mean boron concentration) may be greater than that of the major cations (sodium, potassium, and magnesium) and anions (sulphate, bicarbonate, and chloride) around their respective long-term mean concentrations.

The daily boron values, as estimated by linear regression from the daily specific-conductance readings, for the period January 1993 through December 2012 are shown in Figure 3.11.

The relationship between boron and specific conductance based upon March to October data collected from 1974 to 2009 is as follows:

$$\text{Boron} = (0.0013081 \times \text{specific conductance}) - 0.0677588$$
$$(R^2 = 0.66, n = 363)$$

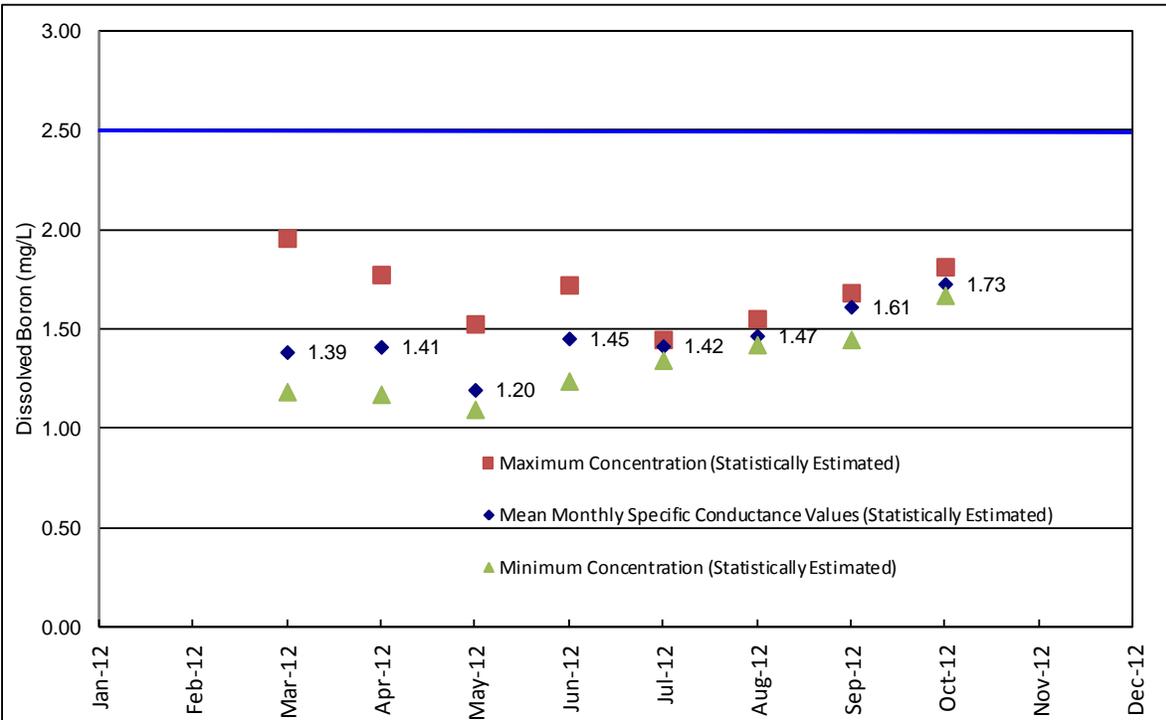


Figure 3.8: Estimated March to October Monthly Boron Concentrations During 2012 for East Poplar River at the International Boundary

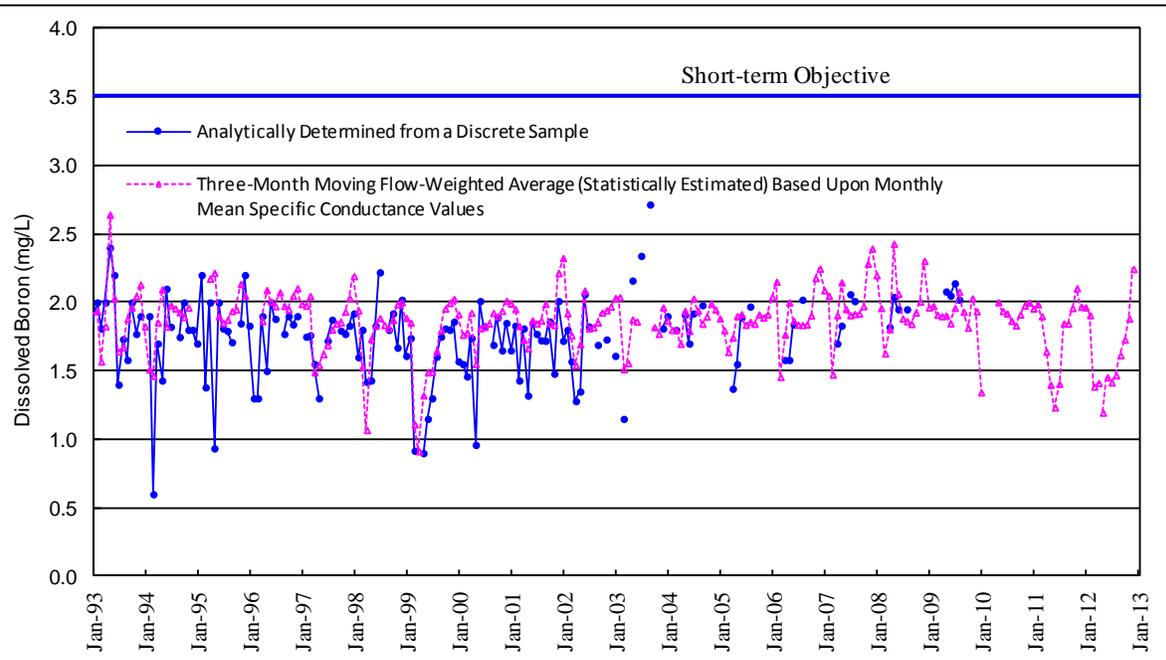


Figure 3.9: Discrete Sample and Three-Month Moving Flow-Weighted Average Estimated Boron Concentrations for East Poplar River at the International Boundary

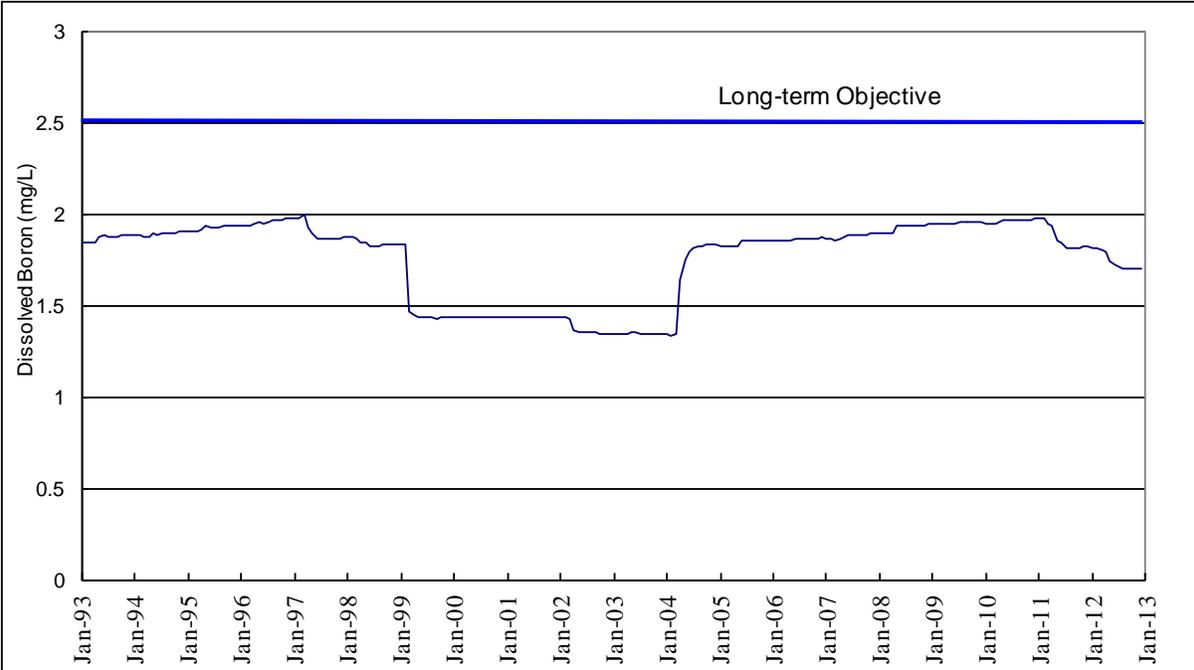


Figure 3.10: Five-Year Moving Flow-Weighted Average Estimated Boron Concentration for East Poplar River at the International Boundary (Statistically Estimated)

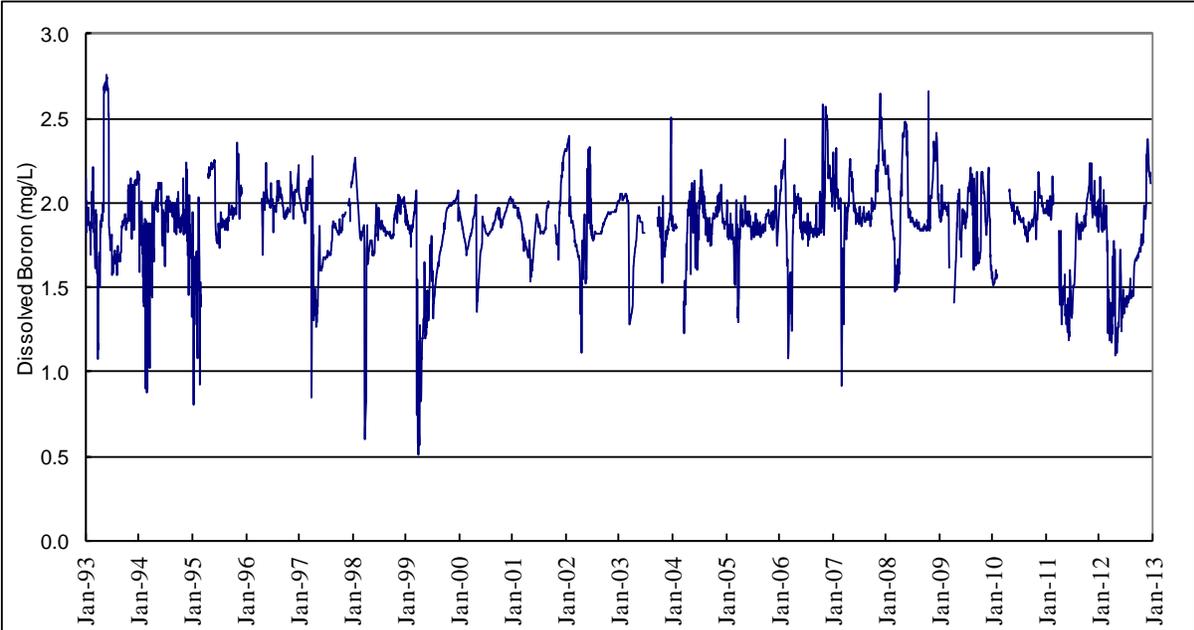


Figure 3.11: Estimated Daily Boron Concentration, 1993-2012 for East Poplar River at the International Boundary (Statistically Estimated)

3.2.5.3 Other Water-Quality Objectives

Table 3.1 contains the multipurpose water-quality objectives for the East Poplar River at International Boundary, recommended by the International Poplar River Water Quality Board in 1979 to the IJC. Please note that no samples were obtained during the 2012 season so the number of samples collected for each parameter and excursions from the recommended objectives are shown as not applicable (N/A) in the table.

For years when samples are obtained, the table shows the number of samples collected for each parameter and the number of times over the course of the year that the objectives were exceeded. Multiple replicate samples collected during the annual quality control exercise are treated as a single sample in the table, but where an objective was exceeded in a replicate sample, this is charged against the single sample noted.

Table 3.1 Recommended Water-Quality Objectives and Excursions, 2012 Sampling Program, East Poplar River at International Boundary (units in mg/L, except as otherwise noted)

Parameter	Objective	No. of Samples		Excursions
		USA	Canada	
Objectives recommended by IJC to Governments				
Boron, dissolved	3.5/2.5 (1)	N/A	N/A	N/A
Total Dissolved Solids	1,500/1,000 (1)	N/A	N/A	N/A
Objectives recommended by Poplar River Bilateral Monitoring Committee to Governments				
Cadmium, total	0.0012	N/A	N/A	N/A
Fluoride, dissolved	1.5	N/A	N/A	N/A
Lead, total	0.03	N/A	N/A	N/A
Nitrate	10.0	N/A	N/A	N/A
Oxygen, dissolved	4.0/5.0 (2)	N/A	N/A	N/A
Sodium adsorption ratio	10.0	N/A	N/A	N/A
Sulphate, dissolved	800.0	N/A	N/A	N/A
Zinc, total	0.03	N/A	N/A	N/A
Water temperature (Celsius)	30.0 (3)	N/A	N/A	N/A
pH (pH units)	6.5 (4)	N/A	N/A	N/A
<p>(1) Three-month average of flow-weighted concentrations should be <3.5 mg/L boron and <1,500 mg/L TDS. Five-year average of flow-weighted concentrations (March to October) should be <2.5 mg/L boron and <1,000 mg/L TDS.</p> <p>(2) 5.0 (minimum April 10 to May 15), 4.0 (minimum, remainder of the year).</p> <p>(3) Natural temperature (April 10 to May 15), <30 degrees Celsius (remainder of the year).</p> <p>(4) Less than 0.5 pH units above natural, minimum pH = 6.5.</p>				

N/A – Not applicable

NOTE: No samples were obtained in 2012.

3.3 Ground Water

3.3.1 Operations – Saskatchewan

SaskPower’s supplementary supply continued to operate during 2012 with 2,144 dam³ (1,738 acre-feet) of ground water being produced. This volume is slightly up from the 2,059 dam³ (1,669 acre-feet) pumped in 2011. Production from 1991 to 2012 has averaged 4,404 dam³ (3,570 acre-feet) per year. Prior to 1991, the well network was part of a dewatering network for coal mining operations, which resulted in the high production levels experienced in the early to mid-1980’s as shown in Figure 3.12. During the 1988-1990 drought period it was evident that there was a continued need for ground water to supplement water levels in Cookson Reservoir. Consequently the wells were taken over by SaskPower for use as a supplementary supply.

Poplar River Power Station - Supplementary Supply

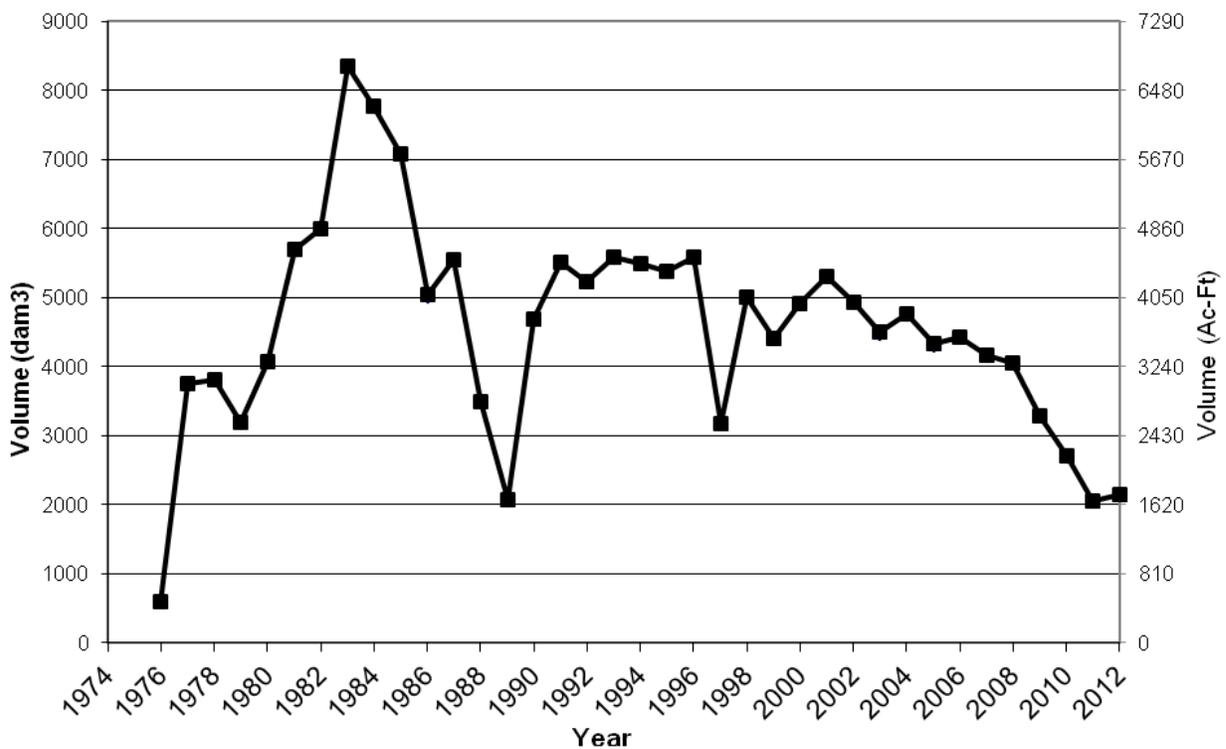


Figure 3.12 Annual Pumpage by the Poplar River Power Station’s Supplementary Water Supply

SaskPower has an Approval and License for the supplementary supply project to produce an annual volume of 5,500 dam³ (4,460 acre-feet). The supplementary supply well network currently consists of 21 wells with a total of 10 discharge points. No wells were added or deleted from the well field during the year.

In addition to the supplementary supply, SaskPower also operates the Soil Salinity Project south of Morrison Dam. The project was initiated in 1989 to alleviate soil salinity which had developed below the dam. The Soil Salinity project consists of a network of production wells discharging into the cooling water canal, which in turn discharges directly to Cookson Reservoir. Ongoing operational difficulties with the production wells resulted in a continued decline in the annual volume pumped from a high of 1,100 dam³ (892 acre-feet) in 1994 to a low point of 363 dam³ (294 acre-feet) in 2011. A well rehabilitation program resulted in some recovery in production rates with production of 812 dam³ (658 acre-feet) in 2006 but subsequent production continued to decline as shown in Figure 3.13.

The total water produced from the Soil Salinity Project for 2012 was 530 dam³ (430 acre-feet), with all of the production from well PW87104 (311 dam³ (252 acre-feet)) and well PW87105 (219 dam³ (178 acre-feet)), both of which are on the east side of the Poplar River. Production since operation of this network began in 1990 has averaged 732 dam³/yr (593 acre-feet).

SaskPower is planning on undertaking an engineering study of the network wells in 2013 followed by a replacement program in 2014 for wells that are no longer operational.

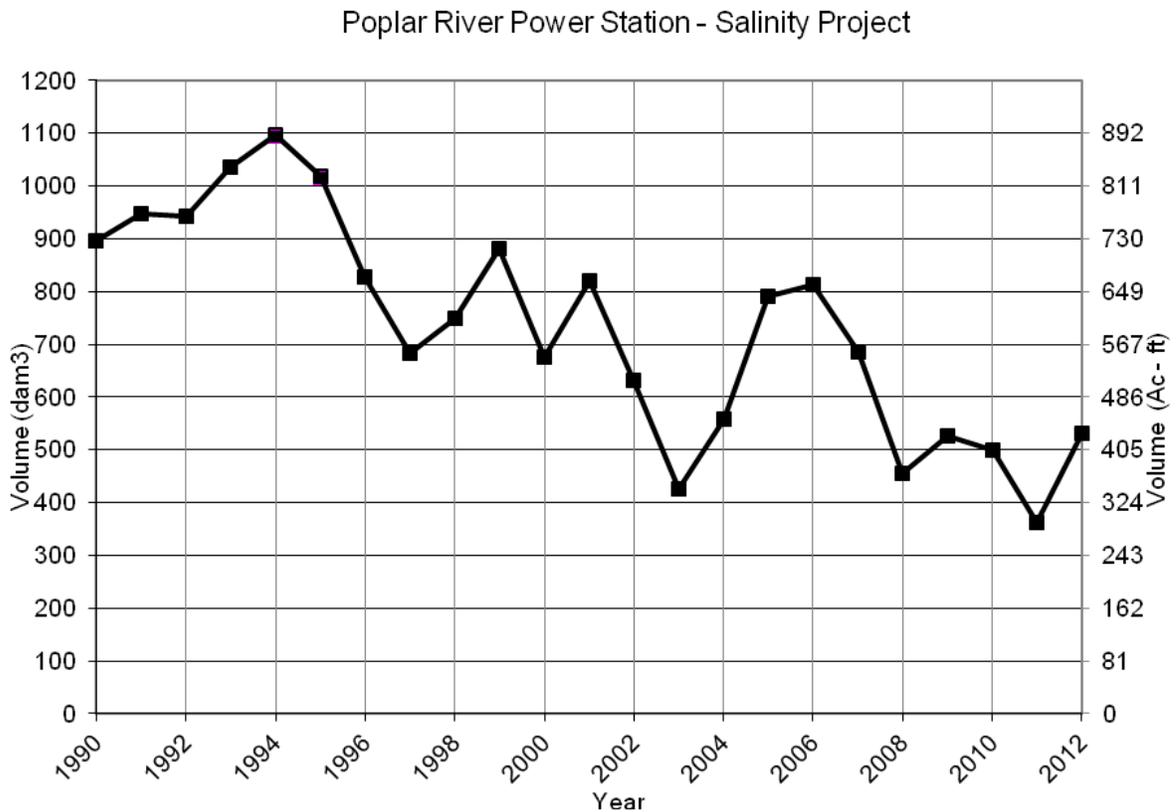


Figure 3.13 Annual Pumpage from Soil Salinity Project

3.3.2 Ground-Water Monitoring

Equivalent geologic formations present in Saskatchewan and Montana have different names. A list of the corresponding formation names is provided in Table 3.2.

Table 3.2 Geologic Formation Name Equivalence between Saskatchewan and Montana

Formation Location	Geologic Formation Name			
Saskatchewan	Eastend to Whitemud	Frenchman	Ravenscrag	Alluvium
Montana	Fox Hills	Hell Creek	Fort Union	Alluvium

3.3.2.1 Saskatchewan

In 2003, SaskPower reduced its monitoring network from 180 to about 85 piezometers. Saskatchewan Environment approved this reduction based on modelling studies undertaken by SaskPower.

The goal of the Soil Salinity Project is to lower groundwater levels in the Empress Sands below Morrison Dam two to three metres (6.6 to 9.8 feet), which is roughly equivalent to pre-reservoir levels. Groundwater withdrawals from 1990 to 1995 ranged between 900 and 1,100 dam³/year (or 730 and 892 acre-feet/year, respectively) and consequently the drawdown objectives were achieved in 1995 and 1996. Due to declining well efficiency, high reservoir levels, and increased precipitation, the water level in the Empress Sands has been increasing since 2009.

The hydrographs of selected Hart Coal Seam monitoring wells near the International Boundary are shown in Figure 3.14. These hydrographs do not show any significant changes in water levels in the Hart Coal Seam near the boundary in the past 25 years.

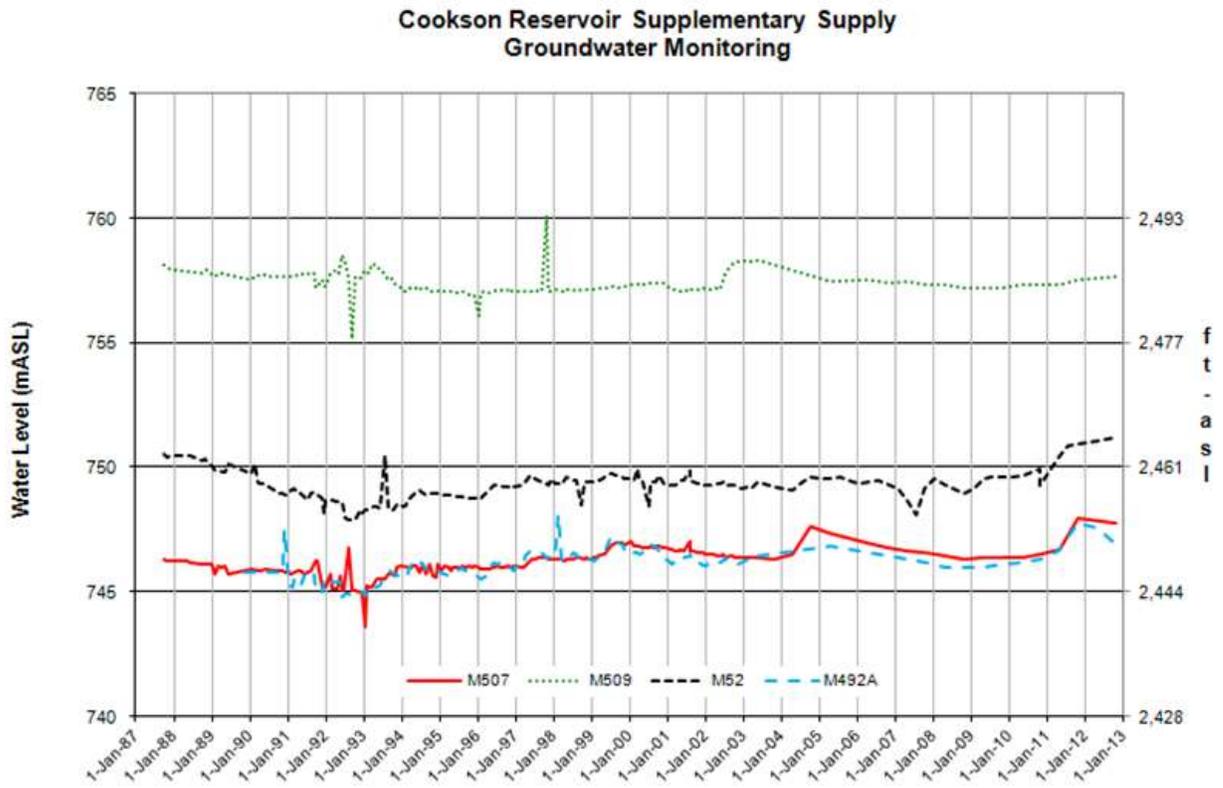


Figure 3.14 Hydrographs of Selected Wells Completed in the Hart Coal Seam

3.3.2.2 Montana

Hydrographs from monitoring wells completed in the Fort Union Formation and/or the Hart Coal Seam (wells 6, 7, 9, 13, 16, 17, and 19) exhibit two general patterns. Water levels in wells 9, 13, 17, and 19 have changed less than 5 ft (1.5 m) since the time monitoring began in 1987. Water levels generally declined between 1987 and 1992-1994; since 1994, water-level trends have been flat or slowly rising with water levels in wells 9 and 19 reaching period-of-record highs in 2011. Water levels in wells 13 and 17 reached period-of-record highs in 2012. Water-level hydrographs from wells 17 and 19 are shown on Figure 3.15. Offsets noted in the legend for Figure 3.15 have been applied to make the hydrographs more readable. Water-level data used to construct the hydrographs in Figure 3.15 can be accessed through the Montana Ground Water Information Center (GWIC) database at <http://mbmgwic.mtech.edu>.

During their period of record, water levels in wells 6, 7, and 16 have changed as much as 17 ft (5.2 m) but generally declined from the beginning of monitoring in 1979 (wells 6 and 7) and 1985 (well 16) until the mid 1990s. Since then, water levels have generally risen. Water levels in well 16 reached period-of-record highs in 1985 and 2012. High water-level elevations in 2011-2012 were related to heavy winter snow accumulation, associated snowmelt runoff, and positive departures from average annual precipitation of almost 6 in (15.2 cm) in the National Oceanic and Atmospheric Administration's northeast Montana climate station. Water-level hydrographs for wells 6 and 7 are shown on Figure 3.15.

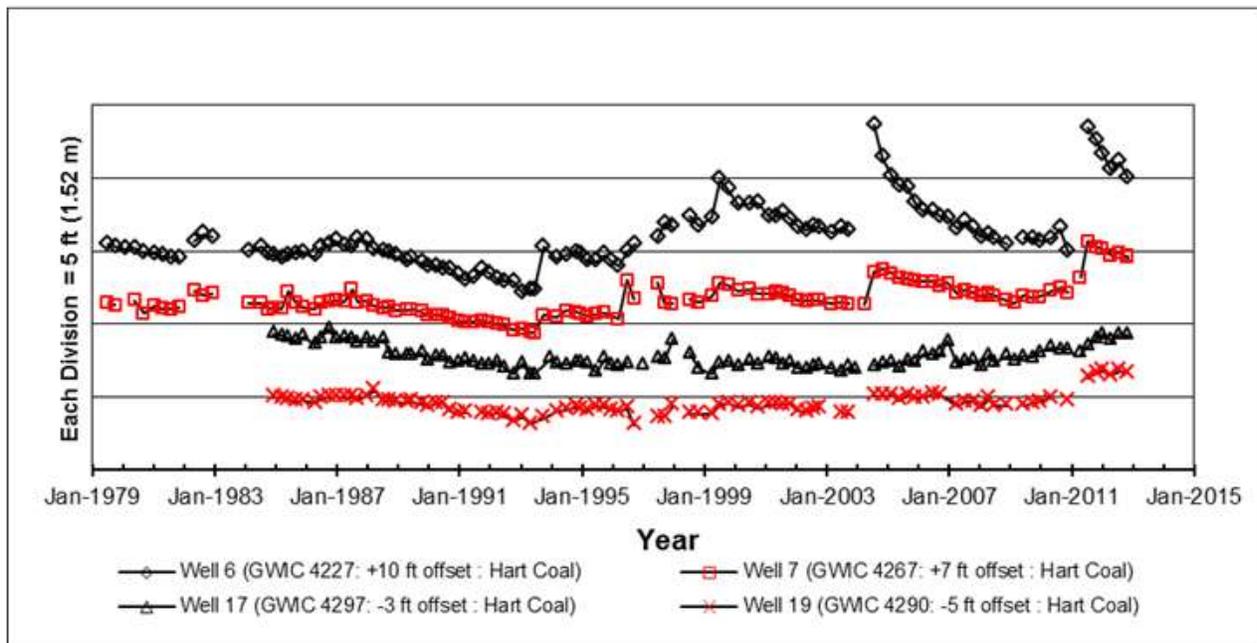


Figure 3.15 Hydrographs of Selected Wells - Hart Coal Aquifers

Water levels in monitoring wells 5, 8, 10, 23, and 24, completed in alluvium and/or outwash, show seasonal change caused by climate and/or precipitation. Heavy snow accumulation and melt in early 2004 caused upward water-level response during the remainder of that year. In subsequent years water levels steadily declined returning to pre-melt 2003 elevations between 2005 (Well 23) and 2008 (Wells 5 and 8). Water levels in wells 5, 8, 10, 23, and 24 peaked again in response to wet climate in 2011.

Hydrographs from alluvium and outwash (wells 10, 23, and 24) and the Fox Hills/Hell Creek aquifer (well 11) are shown in Figure 3.16. Offsets noted in the legend have been applied to the data to make the hydrographs more readable. Measurements from wells 11 and 24 where the wellhead was noted as being frozen are not included. Water-level data used to construct the hydrographs in Figure 3.16 can be accessed through the Montana Ground Water Information Center (GWIC) database at <http://mbmaggwic.mtech.edu>.

The potentiometric surface in the Fox Hills/Hell Creek artesian aquifer (well 11-Figure 3.16) has shown little fluctuation during the 1979-2012 monitoring period.

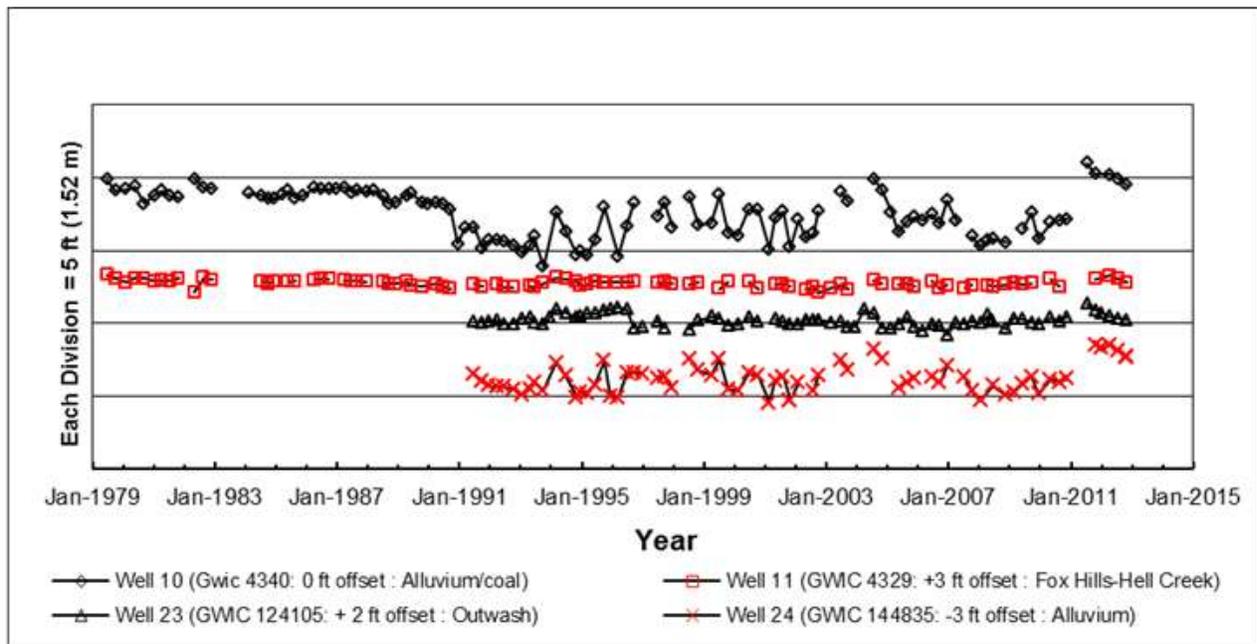


Figure 3.16 Hydrographs of Selected Wells - Alluvium and Fox Hills/Hell Creek Aquifers

Above average precipitation including heavy snow accumulation and subsequent melting caused water levels to rise to near record highs in wells 5, 6, 7, 8, 9, 10, 13, 16, 17, 19, 22, 23, and 24 during 2011 and 2012. Wells 23 and 24 were flowing over their casing tops in April and July 2011 respectively. Water levels in all wells have fallen since and most remain between 1 ft (0.3 m) and 4 ft (1.2 m) above their 2010 altitudes. Exceptions in October 2012 are well 16 where the water level was about 15 ft (4.6 m) and well 23 where the water level was about 0.5 ft (0.2 m) below their respective October 2010 measurements.

3.3.3 Ground-Water Quality

3.3.3.1 Saskatchewan

The water quality from the Poplar River Power Station’s Supplementary Water Supply Project discharge points has been consistent with no trends indicated. A summary of the more frequently tested parameters during 2012 is provided in Table 3.3. Result averages for the 1992-2011 periods are also included in this table for comparison.

TABLE 3.3 Water-Quality Statistics for Water Pumped from Supplementary Water Supply Project Wells*

	1992 to 2011 Average	2012 Average
pH (units)	8.1	8.0
Conductivity (µs/cm)	1283	1182
Total Dissolved Solids	882	842
Total Suspended Solids	12	15
Boron	1.2	0.8
Sodium	171	135
Cyanide (µg/L)	2	2
Iron	0.3	0.4
Manganese	0.1	0.09
Mercury (µg/L)	0.07	0.02
Calcium	67	69
Magnesium	53	58
Sulfate	275	300
Nitrate	0.08	0.97

*All units mg/L unless otherwise noted. Samples obtained at Site “C3” on Girard Creek.

Average results from the common discharge point for the Soil Salinity Project for 2012, plus an average of the 1992-2011 results are provided in Table 3.4. Results have remained relatively consistent since 1992.

TABLE 3.4 Water-Quality Statistics for Water Pumped from Soil Salinity Project Wells Sampled at the Discharge Pipe*

	1992-2011 Average	2012 Average
pH (units)	7.6	7.7
Conductivity (µs/cm)	1462	1679
Total Dissolved Solids	1020	1191
Boron	1.6	1.6
Calcium	104	108
Magnesium	60	58
Sodium	159	228
Potassium	7.5	8.1
Arsenic (µg/L)	11.8	18.0
Aluminum	0.05	0.001
Barium	0.033	0.019
Cadmium	0.013	<0.001
Iron	4.1	4.1
Manganese	0.129	0.114
Molybdenum	0.013	0.001
Strontium	1.741	1.775
Vanadium	0.013	<0.001
Uranium (µg/L)	0.658	1.050
Mercury (µ/L)	0.07	0.02
Sulfate	331	425
Chloride	6.7	7.4
Nitrate	0.064	0.040

*All concentrations are mg/L unless otherwise noted.

Leachate movement through the ash lagoon liner systems can potentially affect ground-water quality in the vicinity of the ash lagoons. The piezometers listed in the Technical Monitoring Schedules are used to assess leachate movement and calculate seepage rates. Piezometric water level, boron, and chloride are the chosen indicator parameters to assess leachate movement.

The chemistry of water immediately above the liner systems is expected to differ from the surface water of the lagoons. Meaningful information is only available from piezometers installed within

Ash Lagoon # 1 where ash has been deposited for many years. Future monitoring of all piezometers completed above the lagoon liner systems will continue in order to improve the understanding of leachate quality and flow from the ash lagoons.

The piezometric surface measurements for the oxidized till continue to show the presence of a ground-water mound beneath the ash lagoons. The mound extends from the center of the Ash Lagoon No. 1 to the southeast side of Ash Lagoon No. 2. Piezometers located in the oxidized till suggest limited leachate activity. No seepage activity is evident in the unoxidized till.

The greatest changes in chloride and boron concentrations within the oxidized till have occurred where piezometric levels have changed the most. Although increasing water levels do not automatically suggest that the water affecting the piezometers is leachate, changing piezometric levels do suggest ground-water movement. On the west side of the Polishing Pond, the boron levels have changed only slightly in the oxidized till piezometers C728A and C728D, where the chloride levels have changed more significantly. The chloride level for C728A had decreased from 403 mg/L in 1983 to 246 mg/L in 2012. The chloride level for C728D has increased from 185 mg/L in 1983 to 349 mg/L in 2012. Although these piezometers are close in proximity and installed at the same level, they are being influenced by different water. Chloride results for C728A suggest initial seepage and it is to be expected that over time the same observation will be seen in C728D.

The piezometric surface of the Empress Gravel indicates a regional flow from northwest to southeast below Morrison Dam. As a general observation, Empress piezometers respond to changing reservoir levels. Results for the Empress layer do not indicate seepage activity with the majority of the analyses showing little change in boron or chloride results.

Piezometer C712B has been monitored for several years. Historically, boron levels were below 1 mg/L. From 1992 to 2012, boron levels have remained relatively steady between 12 and 20 mg/L.

3.3.3.2 Montana

Samples were collected from monitoring wells 7, 16, and 24 during 2012. Well 7 is completed in the Hart Coal Seam, well 16 is completed in the Fort Union Formation, and well 24 is completed in alluvium. Total dissolved solids (TDS) concentrations in samples from wells 7 and 24 are about the same as they were in 2006 but have been trending higher since 2009. The 2012 sample shows that the TDS concentration in well 16 was above the concentration observed in the 2011 sample; all samples since 2009 are well above the anomalously low value observed that year, and TDS in 2012 was very near that observed in 2008. Changes in TDS with time for wells 7, 16, and 24 are shown in Figure 3.17. Water-chemistry data used to construct the graphs in Figure 3.17 can be accessed through the Montana Ground Water Information Center (GWIC) database at <http://mbmggwic.mtech.edu>.

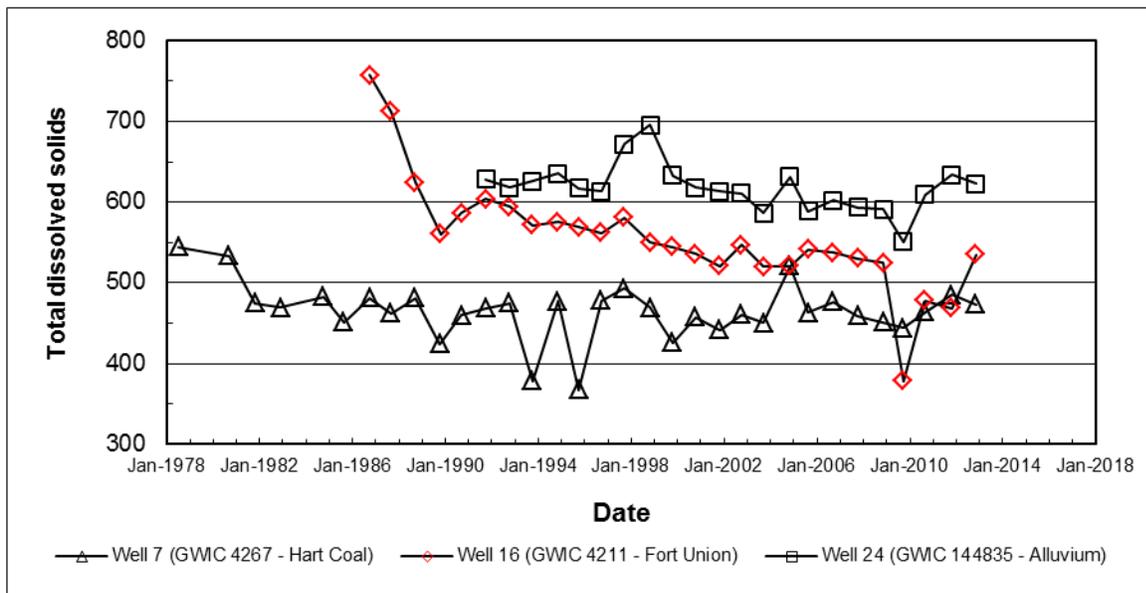


Figure 3.17 Total Dissolved Solids in Samples from Montana Wells.

3.4 Cookson Reservoir

3.4.1 Storage

On January 1, 2012, Cookson Reservoir storage was 39,400 dam³ (31,940 acre-feet) or 91 % of the full supply volume. The 2012 maximum, minimum, and period elevations and volumes are shown in Table 3.5.

Spring inflows into the reservoir were above median in 2012, bringing the reservoir to its full supply elevation of 753 m (2,470.47 ft) on March 19. The reservoir was at full supply level until early April before water levels started to decrease, due to limited inflows, evaporative processes, and water releases. A release of 1,384 dam³ (1,122 acre-feet) was made in May to meet the recommended Poplar River Basin demand release. Rainfall runoff events during early June combined with groundwater pumping brought the reservoir up 0.14 m (0.46 ft) to an elevation of 752.91 m (2,470.18 ft) on June 9. At the end of 2012, the reservoir was at 751.98 m (2,470.18 ft), or approximately 1 m (3 ft) below full supply.

In addition to runoff, reservoir levels were augmented by groundwater pumping. Wells in the abandoned west block mine site supplied 2,144 dam³ (1,738 acre-feet) to Girard Creek. Wells in the soil salinity project area supplied 530 dam³ (430 acre-feet).

Table 3.5 Cookson Reservoir Storage Statistics for 2012

Date	Elevation (m)	Elevation (ft)	Contents (dam³)	Contents (acre-feet)
January 1	752.47	2,468.73	39,400	31,940
April 4 (Maximum)	753.02	2,470.54	43,556	35,310
December 31 (Minimum)	751.98	2,467.13	35,826	29,040
December 31	751.98	2,467.13	35,826	29,040
Full Supply Level	753.00	2,470.47	43,410	35,190

The Poplar River Power Station is dependent on water from Cookson Reservoir for cooling. Power plant operation is not adversely affected until reservoir levels drop below 749.0 m (2,457.3 ft). The dead storage level for cooling water used in the generation process is 745.0 m (2,444.2 ft). The 2012 recorded levels and associated operating levels are shown in Figure 3.18 along with the 10-year median levels. Likewise, the 2012 storage and associated operating levels are shown in Figure 3.19 along with the 10-year median levels.

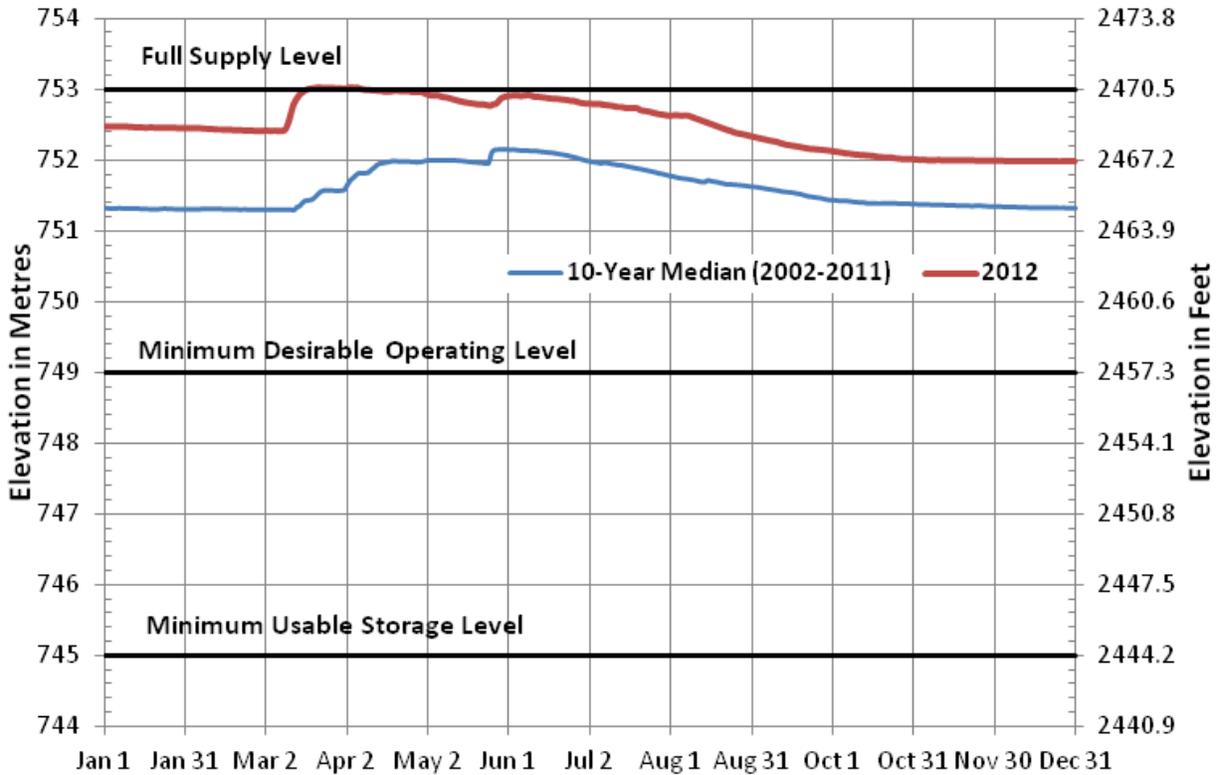


Figure 3.18 Cookson Reservoir Daily Mean Water Levels for 2012 and Median Daily Water Levels, 2002-2011

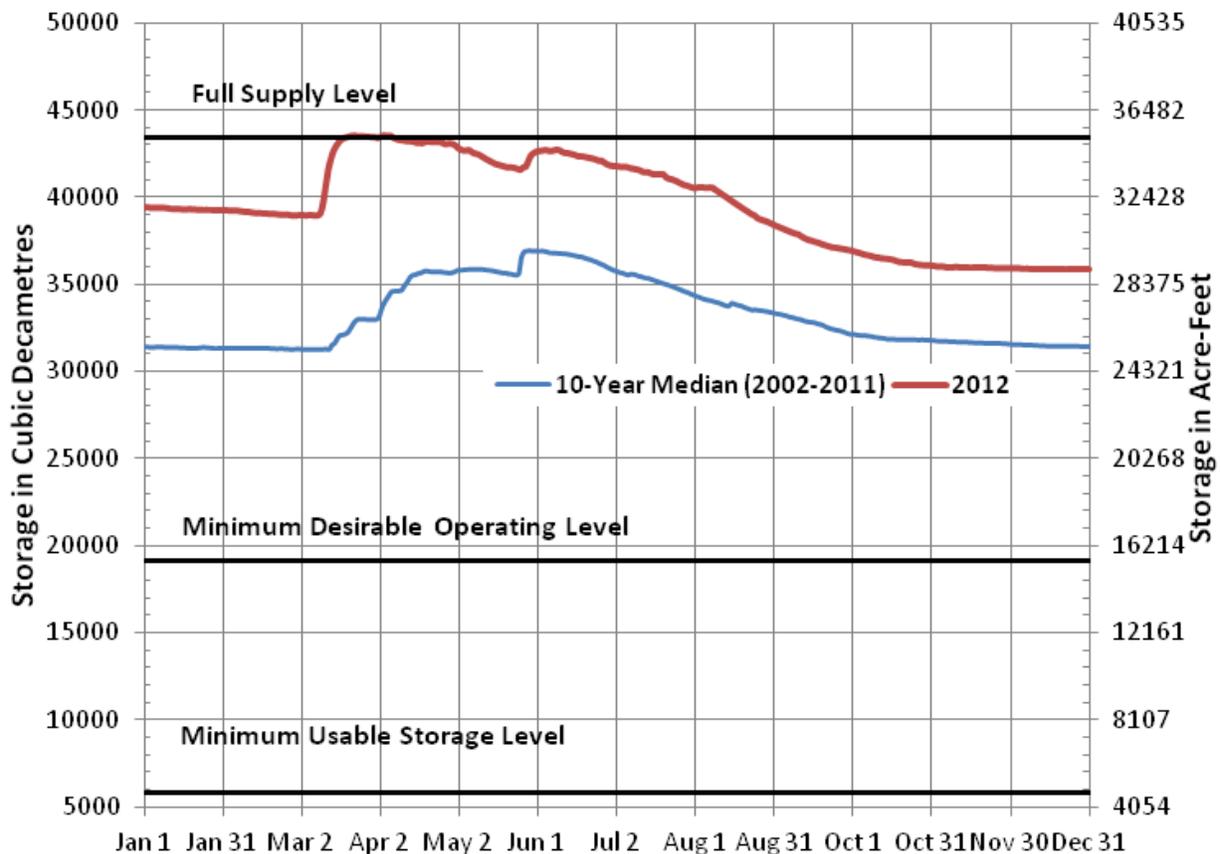


Figure 3.19 Cookson Reservoir Daily Mean Water Storage for 2012 and Median Daily Storage, 2002-2011

3.4.2 Water Quality

One major factor affecting the water quality of Cookson Reservoir is volume. Low reservoir volumes will decrease the water quality while high volumes will improve the water quality. The reservoir volume is controlled by two factors: inflow, which consists of spring runoff, precipitation and supplementary water supply, and losses, which consist of evaporation, water uses and apportionment releases.

The period from 1987 to 1993 saw very low volumes of surface-water run-off to Cookson Reservoir. Consequently, total dissolved solids (TDS) in the reservoir increased steadily from approximately 780 mg/L to over 1,800 mg/L as shown in figure 3.20. From 1997 to 2004, the TDS levels in the reservoir generally remained below 1,000 mg/L. The TDS levels increased to 1,540 mg/L between 2005 and 2008 before significant runoff reduced the TDS levels to 1,160 mg/L in 2009. Above normal precipitation runoff volumes in June 2011 significantly reduced the average TDS level in Cookson Reservoir to 391 mg/L with a slight increase to 694 mg/L occurring in 2012.

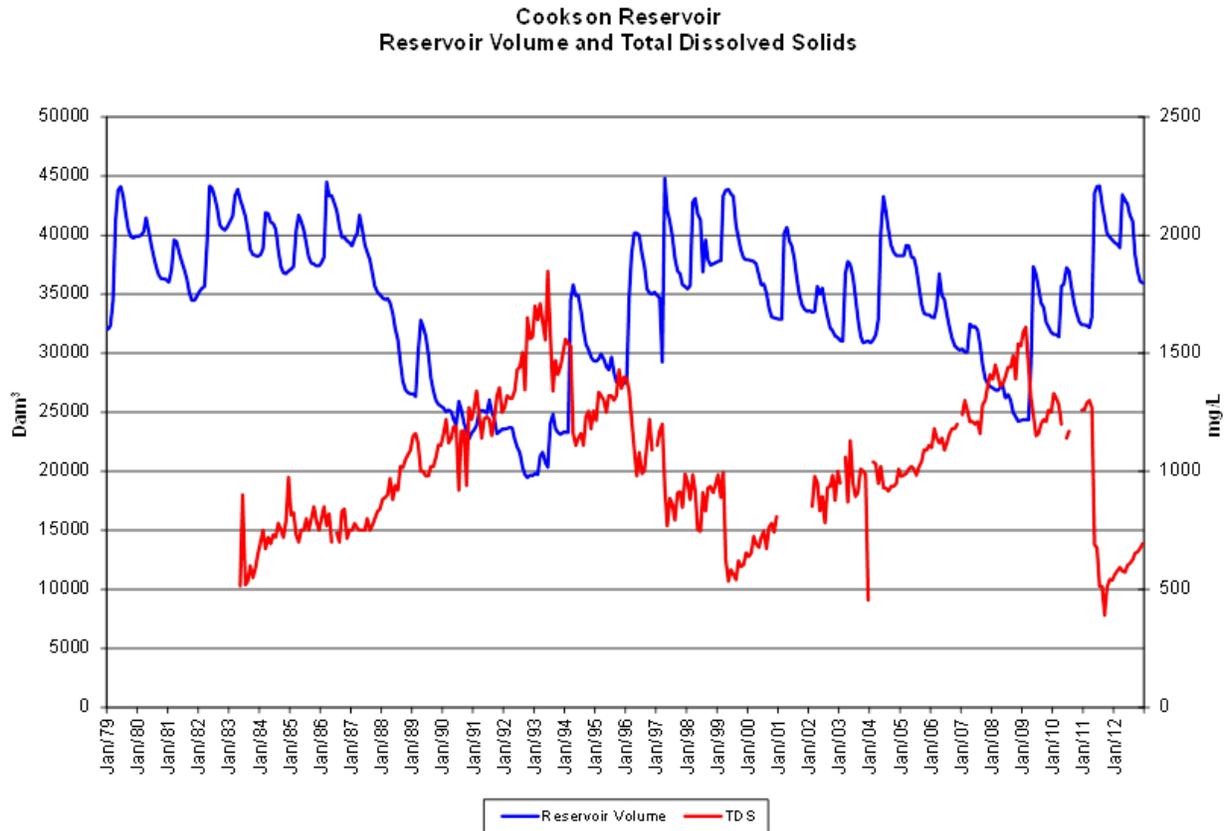


Figure 3.20 Reservoir Volume and Total Dissolved Solids Concentrations from 1979-2012 for Cookson Reservoir

3.5 Air Quality

SaskPower’s ambient SO₂ monitoring for 2012 recorded no values greater than Saskatchewan Environment’s one-hour average standard of 0.17 ppm and the 24-hour average standard of 0.06 ppm. The 2012 geometric mean for the high-volume suspended-particulate sampler was 12.6 µg/m³ and 2012 was the twenty-first consecutive year of below-average standard particulate readings.

3.6 Quality Control

3.6.1 Streamflow

No comparative current-meter discharge measurements were made in 2012 at the East Poplar River at International Boundary site between personnel from the U.S. Geological Survey (USGS) and Environment Canada (EC) to confirm streamflow measurement comparability.

3.6.2 Water Quality

No joint sampling was performed in 2012 at the East Poplar River at International Boundary due to continued suspension in the surface-water-quality sampling program by the USGS and EC.

ANNEX 1

POPLAR RIVER

COOPERATIVE MONITORING ARRANGEMENT

CANADA-UNITED STATES

POPLAR RIVER COOPERATIVE MONITORING ARRANGEMENT

I. PURPOSE

This Arrangement will provide for the exchange of data collected as described in the attached Technical Monitoring Schedules in water-quality, water quantity and air quality monitoring programs being conducted in Canada and the United States at or near the International Boundary in response to SaskPower development. This Arrangement will also provide for the dissemination of the data in each country and will assure its comparability and assist in its technical interpretation.

The Arrangement will replace and expand upon the quarterly information exchange program instituted between Canada and the United States in 1976.

II. PARTICIPATING GOVERNMENTS

Governments and government agencies participating in the Arrangement are:

Government of Canada: Environment Canada

Government of the Province of Saskatchewan:

Saskatchewan Environment and Resource Management

Government of the United States of America: United States Geological Survey

Government of the State of Montana: Executive Office

III. POPLAR RIVER MONITORING COMMITTEE: TERMS OF REFERENCE

A binational committee called the Poplar River Bilateral Monitoring Committee will be established to carry out responsibilities assigned to it under this Arrangement. The Committee will operate in accordance with the following terms of reference:

A. Membership

The Committee will be composed of four representatives, one from each of the participating Governments. It will be jointly chaired by the Government of Canada and the Government of the United States. There will be a Canadian Section and a United States Section. The participating Governments will notify each other of any changes in membership on the Committee. Co-chairpersons may by mutual agreement invite agency technical experts to participate in the work of the Committee.

The Governor of the State of Montana may also appoint a chief elective official of local government to participate as an ex-officio member of the Committee in its technical deliberations. The Saskatchewan Minister of the Environment may also appoint a similar local representative.

B. Functions of the Committee

The role of the Committee will be to fulfil the purpose of the Arrangement by ensuring the exchange of monitored data in accordance with the attached Technical Monitoring Schedules, and its collation and technical interpretation in reports to Governments on implementation of the Arrangement. In addition, the Committee will review the existing monitoring systems to ensure their adequacy and may recommend to the Canadian and United States Governments any modifications to improve the Technical Monitoring Schedules.

1. Information Exchange

Each Co-chairperson will be responsible for transmitting to his counterpart Co-chairperson on a regular, and not less than quarterly basis, the data provided by the cooperative monitoring agencies in accordance with the Technical Monitoring Schedules.

2. Reports

- (a) The Committee will prepare a joint Annual Report to the participating governments, and may at any time prepare joint Special Reports.
- (b) Annual Reports will
 - i) summarize the main activities of the Committee in the year under Report and the data which has been exchanged under the Arrangement;
 - ii) draw to the attention of the participating governments any definitive changes in the monitored parameters, based on collation and technical interpretation of exchanged data (i.e. the utilization of summary, statistical and other appropriate techniques);
 - iii) draw to the attention of the participating governments any recommendations regarding the adequacy or redundancy of any scheduled monitoring operations and any proposals regarding modifications to the Technical Monitoring Schedules, based on a continuing review of the monitoring programs including analytical methods to ensure their comparability.
- (c) Special Reports may, at any time, draw to the attention of participating governments definitive changes in monitored parameters which may require immediate attention.
- (d) Preparation of Reports

Reports will be prepared following consultation with all committee members and will be signed by all Committee members. Reports will be separately forwarded by the Committee Co-chairmen to the participating governments. All annual and special reports will be so distributed.

3. Activities of Canadian and United States Sections

The Canadian and United States section will be separately responsible for:

- (a) dissemination of information within their respective countries, and the arrangement of any discussion required with local elected officials;
- (b) verification that monitoring operations are being carried out in accordance with the Technical Monitoring Schedules by cooperating monitoring agencies;
- (c) receipt and collation of monitored data generated by the cooperating monitoring agencies in their respective countries as specified in the Technical Monitoring Schedules;
- (d) if necessary, drawing to the attention of the appropriate government in their respective countries any failure to comply with a scheduled monitoring function on the part of any cooperating agency under the jurisdiction of that government, and requesting that appropriate corrective action be taken.

IV. PROVISION OF DATA

In order to ensure that the Committee is able to carry out the terms of this Arrangement, the participating governments will use their best efforts to have cooperating monitoring agencies, in their respective jurisdictions provide on an ongoing basis all scheduled monitored data for which they are responsible.

V. TERMS OF THE ARRANGEMENT

The Arrangement will be effective for an initial term of five years and may be amended by agreement of the participating governments. It will be subject to review at the end of the initial term and will be renewed thereafter for as long as it is required by the participating governments.

ANNEX 2

POPLAR RIVER

COOPERATIVE MONITORING ARRANGEMENT

TECHNICAL MONITORING SCHEDULES

2013

CANADA-UNITED STATES

TABLE OF CONTENTS

PREAMBLE	A2 - 5
<u>CANADA</u>	
STREAMFLOW MONITORING	A2 - 8
SURFACE-WATER-QUALITY MONITORING	A2 - 10
GROUND-WATER PIEZOMETERS TO MONITOR POTENTIAL DRAWDOWN DUE TO COAL-SEAM DEWATERING NEAR THE INTERNATIONAL BOUNDARY	A2 - 14
GROUND-WATER PIEZOMETER MONITORING - POWER STATION AREA	A2 - 16
GROUND-WATER PIEZOMETER MONITORING - ASH LAGOON AREA	
WATER LEVEL	A2 - 18
WATER QUALITY	A2 - 19
AMBIENT AIR-QUALITY MONITORING	A2 - 22
<u>UNITED STATES</u>	
STREAMFLOW MONITORING	A2 - 26
SURFACE-WATER-QUALITY MONITORING	A2 - 28
GROUND-WATER-QUALITY MONITORING	A2 - 30
GROUND-WATER LEVELS TO MONITOR POTENTIAL DRAWDOWN DUE TO COAL-SEAM DEWATERING	A2 - 32

PREAMBLE

The Technical Monitoring Schedule lists those water quantity, water-quality and air quality monitoring locations and parameters which form the basis for information exchange and reporting to Governments. The structure of the Committee responsible for ensuring the exchange takes place is described in the Poplar River Cooperative Monitoring Arrangement.

The monitoring locations and parameters listed herein have been reviewed by the Poplar River Bilateral Monitoring Committee and represent the basic technical information needed to identify any definitive changes in water quantity, water quality and air quality at the International Boundary. The Schedule was initially submitted to Governments for approval as an attachment to the 1981 report to Governments. Changes in the sampling locations and parameters may be made by Governments based on the recommendations of the Committee.

Additional information has been or is being collected by agencies on both sides of the International Boundary, primarily for project management or basin-wide baseline data purposes. This additional information is usually available upon request from the collecting agency and forms part of the pool of technical information which may be drawn upon by Governments for specific study purposes. Examples of additional information are water-quantity, water-quality, ground-water and air-quality data collected at points in the Poplar River basin not of direct concern to the Committee. In addition, supplemental information on parameters such as vegetation, soils, fish and waterfowl populations and aquatic vegetation has been collected on either a routine or specific-studies basis by various agencies.

POPLAR RIVER

COOPERATIVE MONITORING ARRANGEMENT

TECHNICAL MONITORING SCHEDULES

2013

CANADA

STREAMFLOW MONITORING

Daily mean discharge or levels and instantaneous monthly extremes as normally published in surface-water-data publications.


Responsible Agencies: Environment Canada, Security Water Agency		
No. on Map	Station No.	Station Name
1 [*]	11AE003 ^{**} (06178500)	East Poplar River at International Boundary
2	11AE013 ^{***}	Cookson Reservoir near Coronach
3	11AE015 ^{***}	Girard Creek near Coronach Cookson Reservoir
4	11AE014 ^{***}	East Poplar River above Cookson Reservoir
5		Fife Lake Overflow ^{****}
6 [*]	11AE008 (06178000)	Poplar River at International Boundary

* International gauging station.

** Environment Canada assumed monitoring responsibility effective March 1, 2012.

*** SWA took over the monitoring responsibility effective July 1, 1992.

**** Miscellaneous measurements of outflow to be made by Security Water Agency (SWA) during periods of outflow only.

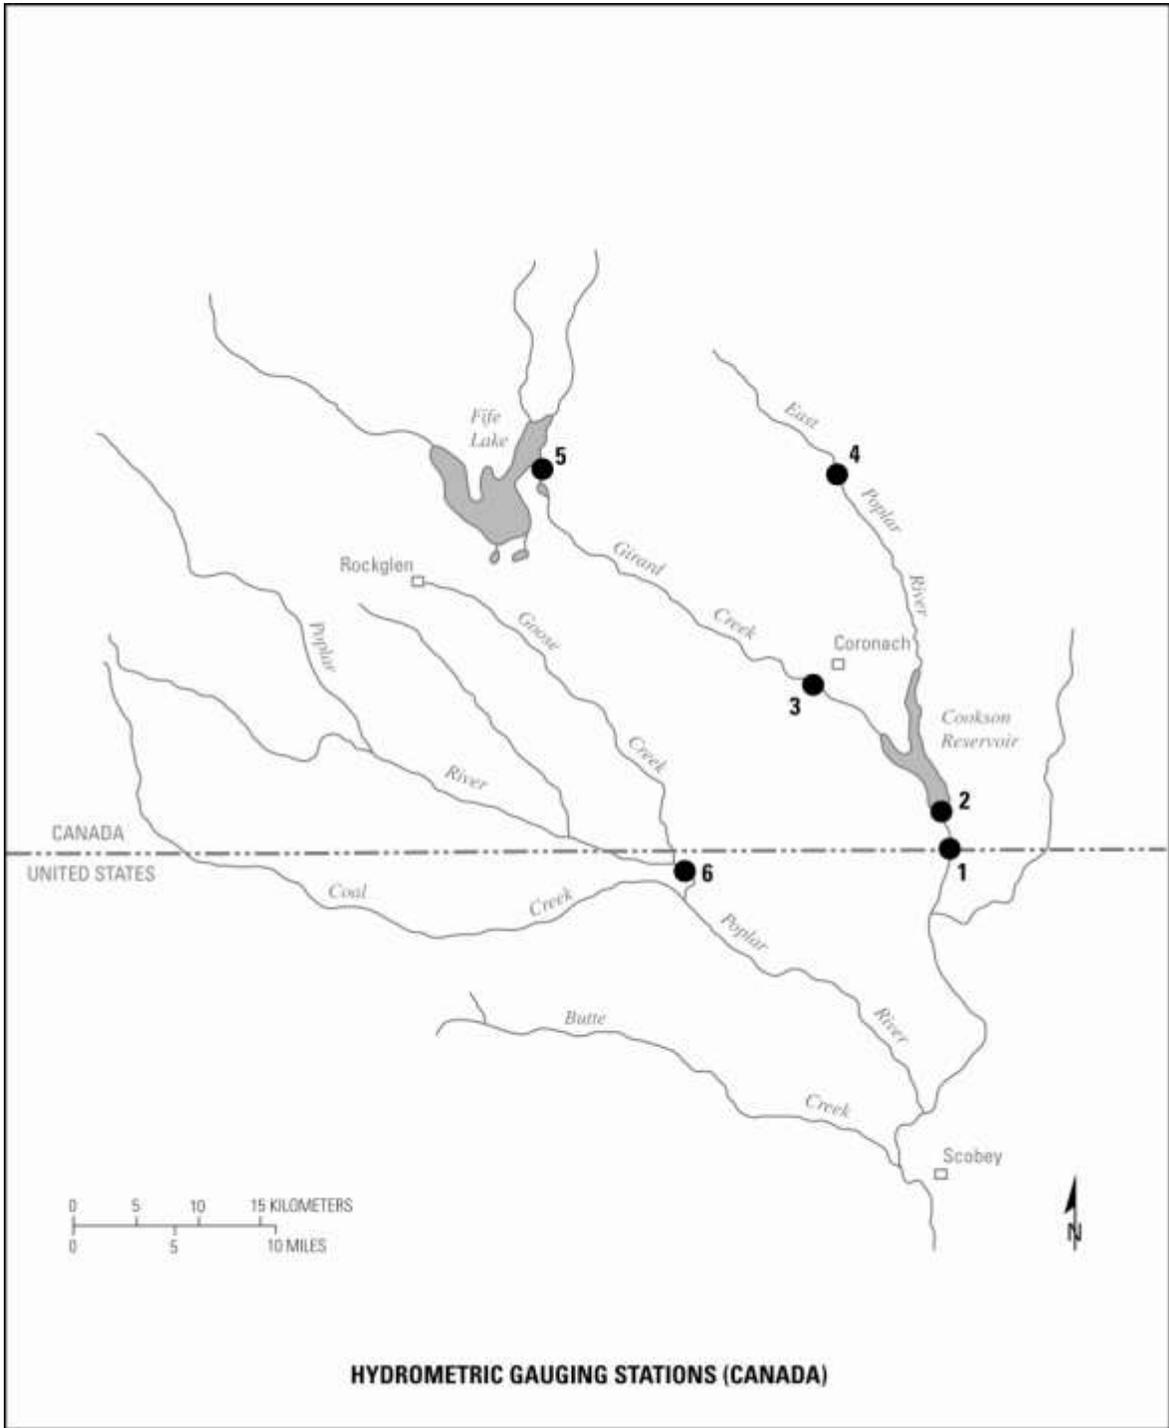


SURFACE-WATER-QUALITY MONITORING

Sampling Locations

Responsible Agency: Environment Canada		
No. on Map	Station No.	Station Name
1	00SA11AE0008 Suspended	East Poplar River at International Boundary

Responsible Agency: Saskatchewan Environment		
Data collected by: Sask Power		
No. on Map	Station No.	Station Name
2	12386 Discontinued	East Poplar River at Culvert immediately below Cookson Reservoir
3	12368	Cookson Reservoir near Dam
4	12377 Discontinued	Upper End of Cookson Reservoir at Highway 36
5	12412 Discontinued	Girard Creek at Coronach, Reservoir Outflow
6	7904	Fife Lake Outflow*

*Sampled only when outflow occurs for a 2-week period, which does not occur every year.

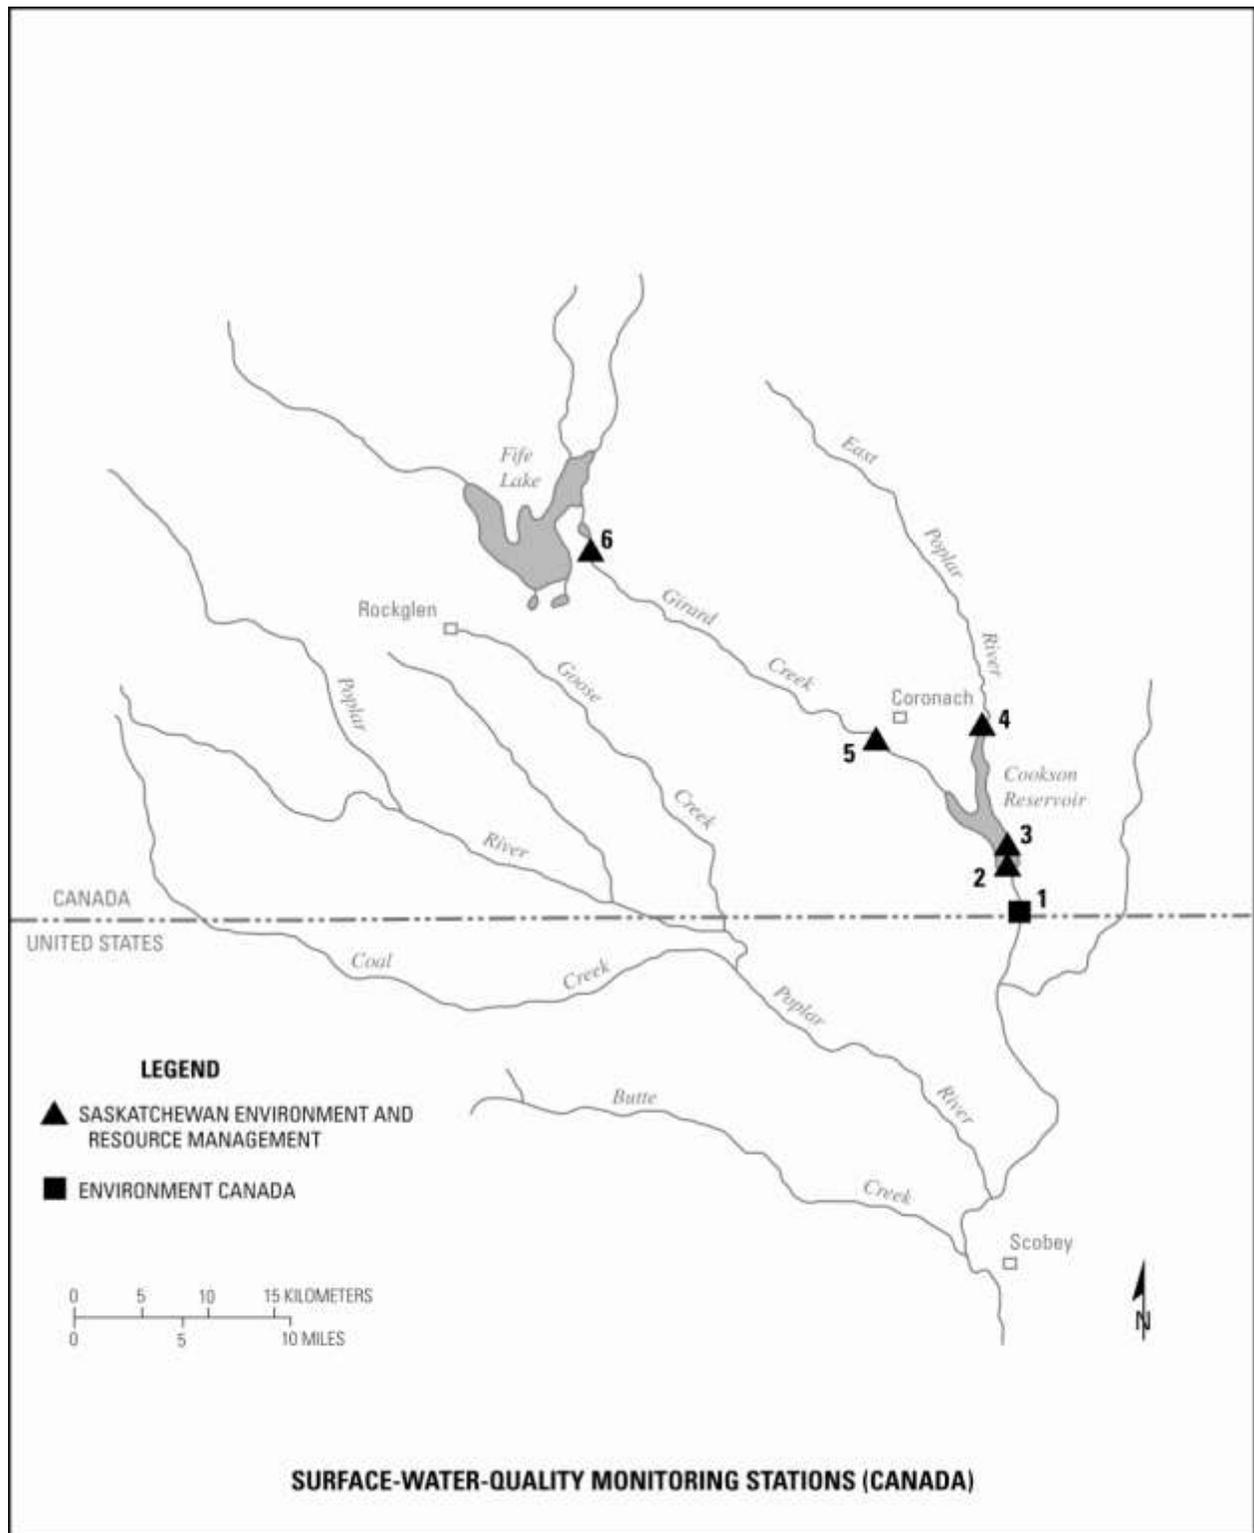

PARAMETERS

Responsible Agency: Environment Canada			
ENVIRODAT* Code	Parameter	Analytical Method	Sampling Frequency Station No. 1
10151	Alkalinity-phenolphthalein	Potentiometric Titration	SUS
10111	Alkalinity-total	Potentiometric Titration	SUS
13102	Aluminum-dissolved	AA-Direct	SUS
13302	Aluminum-extracted	AA-Direct	SUS
07540	Ammonia-total	Automated Colourimetric	SUS
33108	Arsenic-dissolved	ICAP-hydride	SUS
56001	Barium-total	AA-Direct	SUS
06201	Bicarbonates	Calculated	SUS
05211	Boron-dissolved	ICAP	SUS
96360	Bromoxynil	Gas Chromatography	SUS
48002	Cadmium-total	AA Solvent Extraction	SUS
20113	Calcium	AA-Direct	SUS
06104	Carbon-dissolved organic	Automated IR Detection	SUS
06901	Carbon-particulate	Elemental Analyzer	SUS
06002	Carbon-total organic	Calculated	SUS
06301	Carbonates	Calculated	SUS
17206	Chloride	Automated Colourimetric	SUS
06717	Chlorophyll a	Spectrophotometric	SUS
24003	Chromium-total	AA-Solvent Extraction	SUS
27002	Cobalt-total	AA-Solvent Extraction	SUS
36012	Coliform-fecal	Membrane Filtration	SUS
36002	Coliform-total	Membrane Filtration	SUS
02021	Colour	Comparator	SUS
02041	Conductivity	Wheatstone Bridge	SUS
06610	Cyanide	Automated UV-Colourimetric	SUS
09117	Fluoride-dissolved	Electrometric	SUS
06401	Free Carbon Dioxide	Calculated	SUS
10602	Hardness	Calculated	SUS
17811	Hexachlorobenzene	Gas Chromatography	SUS
08501	Hydroxide	Calculated	SUS
26104	Iron-dissolved	AA-Direct	SUS
82002	Lead-total	AA-Solvent Extraction	SUS
12102	Magnesium	AA-Direct	SUS
25104	Manganese-dissolved	AA-Direct	SUS
07901	N-particulate	Elemental Analyzer	SUS
07651	N-total dissolved	Automated UV Colourimetric	SUS
10401	NFR	Gravimetric	SUS
28002	Nickel-total	AA-Solvent Extraction	SUS
07110	Nitrate/Nitrite	Colourimetric	SUS
07603	Nitrogen-total	Calculated	SUS
10650	Non-Carbonate Hardness	Calculated	SUS
18XXX	Organo Chlorines	Gas Chromatography	SUS
08101	Oxygen-dissolved	Winkler	SUS
15901	P-particulate	Calculated	SUS
15465	P-total dissolved	Automated Colourimetric	SUS
185XX	Phenoxy Herbicides	Gas Chromatography	SUS
15423	Phosphorus-total	Colourimetric (TRAACS)	SUS
19103	Potassium	Flame Emission	SUS
11250	Percent Sodium	Calculated	SUS
011201	SAR	Calculated	SUS
00210	Saturation Index	Calculated	SUS
34108	Selenium-dissolved	ICAP-hydride	SUS
14108	Silica	Automated Colourimetric	SUS
11103	Sodium	Flame Emission	SUS
00211	Stability Index	Calculated	SUS
16306	Sulphate	Automated Colourimetric	SUS
00201	TDS	Calculated	SUS
02061	Temperature	Digital Thermometer	SUS
02073	Turbidity	Nephelometry	SUS
23002	Vanadium-total	AA-Solvent Extraction	SUS
30005	Zinc-total	AA-Solvent Extraction	SUS
10301	pH	Electrometric	SUS
92111	Uranium	Fluometric	SUS

* - Computer Storage and Retrieval System -- Environment Canada

AA - Atomic Absorption

NFR - Nonfilterable Residue

UV - Ultraviolet

ICAP - Inductively Coupled Argon Plasma.

SUS - Suspended

PARAMETERS

Responsible Agency: Saskatchewan Environment							
Data Collected by: SaskPower							
ESQUADAT* Code	Parameter	Analytical method	Sampling Frequency Station No.				
			2	3	4	5	6
10151	Alkalinity-phenol	Pot-Titration	DIS	Q	DIS	DIS	OF
10101	Alkalinity-tot	Pot-Titration	DIS	Q	DIS	DIS	OF
13004	Aluminum-tot	AA-Direct	DIS	A	DIS	DIS	
33004	Arsenic-tot	Flameless AA	DIS	A	DIS	DIS	
06201	Bicarbonates	Calculated	DIS	Q	DIS	DIS	OF
05451	Boron-tot	ICAP	DIS	Q	DIS	DIS	W
48002	Cadmium-tot	AA-Solvent Extract (MIBK)	DIS	A	DIS	DIS	
20113	Calcium	AA-Direct	DIS	Q	DIS	DIS	OF
06052	Carbon-tot Inorganic	Infrared	DIS	Q	DIS	DIS	OF
06005	Carbon-tot Organic	Infrared	DIS	Q	DIS	DIS	OF
06301	Carbonates	Calculated	DIS	Q	DIS	DIS	OF
17203	Chloride	Automated Colourimetric	DIS	Q	DIS	DIS	OF
06711	Chlorophyll- 'a'	Spectrophotometry	DIS	Q	DIS	DIS	
24004	Chromium-tot	AA-Direct	DIS	A	DIS	DIS	
36012	Coliform-fec	Membrane filtration	DIS	Q	DIS	DIS	OF
36002	Coliform-tot	Membrane filtration	DIS	Q	DIS	DIS	OF
02041	Conductivity	Conductivity Meter	DIS	Q	DIS	DIS	W
29005	Copper-tot	AA-Solvent Extract (MIBK)	DIS	A	DIS	DIS	
09105	Fluoride	Specific Ion Electrode	DIS	A	DIS	DIS	
82002	Lead-tot	AA-Solvent Extract (MIBK)	DIS	A	DIS	DIS	
12102	Magnesium	AA-Direct	DIS	Q	DIS	DIS	OF
80011	Mercury-tot	Flameless-AA	DIS	A	DIS	DIS	
42102	Molybdenum	AA-Solvent Extract (N-Butyl acetate)	DIS	A	DIS	DIS	
07015	N-TKN	Automated Colourimetric	DIS	Q	DIS	DIS	OF
10401	NFR	Gravimetric	DIS	Q	DIS	DIS	OF
10501	NFR(F)	Gravimetric	DIS	Q	DIS	DIS	OF
28002	Nickel-tot	AA-Solvent Extract (MIBK)	DIS	Q	DIS	DIS	OF
07110	Nitrate + NO ₂	Automated Colourimetric	DIS	Q	DIS	DIS	OF
06521	Oil and Grease	Pet. Ether Extraction	DIS	A	DIS	DIS	
08102	Oxygen-diss	Meter	DIS	Q	DIS	DIS	OF
15406	Phosphorus-tot	Colourimetry	DIS	Q	DIS	DIS	OF
19103	Potassium	Flame Photometry	DIS	Q	DIS	DIS	OF
34005	Selenium-Ext	Hydride generation	DIS	A	DIS	DIS	
11103	Sodium	Flame Photometry	DIS	Q	DIS	DIS	OF
16306	Sulphate	Colourimetry	DIS	Q	DIS	DIS	OF
10451	TDS	Gravimetric	DIS	Q	DIS	DIS	OF
02061	Temperature	Thermometer	DIS	Q	DIS	DIS	OF
23004	Vanadium-tot	AA-Direct	DIS	A	DIS	DIS	
30005	Zinc-tot	AA-Solvent Extract (MIBK)	DIS	A	DIS	DIS	
10301	pH	Electrometric	DIS	Q	DIS	DIS	W

* Computer storage and retrieval system - Saskatchewan Environment.


Symbols:

W – Weekly during overflow; OF– Once during each period of overflow greater than 2 weeks' duration;
 Q – Quarterly; A – Annually; AA – Atomic Absorption; Pot – Potentiometric; tot – total; Pet – Petroleum;
 fec – fecal; diss – dissolved; EXT – extract; NFR – Nonfilterable residue; NFR(F) – Nonfilterable residue, fixed;
 ICAP – Inductively Coupled Argon Plasma; (MIBK) – sample acidified and extracted with Methyl Isobutyl Ketone;
 DIS - Discontinued.

**GROUNDWATER PIEZOMETERS TO MONITOR POTENTIAL DRAWDOWN
DUE TO COAL-SEAM DEWATERING NEAR THE INTERNATIONAL BOUNDARY**


Responsible Agency: Security Water Agency*			
Measurement Frequency: Quarterly			
Piezometer Number	Location	Tip of Screen Elevation (m)	Perforation Zone (depth in metres)
52	NW 14-1-27 W3	738.43	43-49 (in coal)
506B	SW 4-1-27 W3	48.27	81-82 (in coal)
507	SW 6-1-26 W3	725.27	34 - 35 (in coal)
509	NW 11-1-27 W3	725.82	76-77 (in coal)
510A	NW 1-1-28 W3	769.34	28-29 (in coal and clay)

*Data Collected by: SaskPower

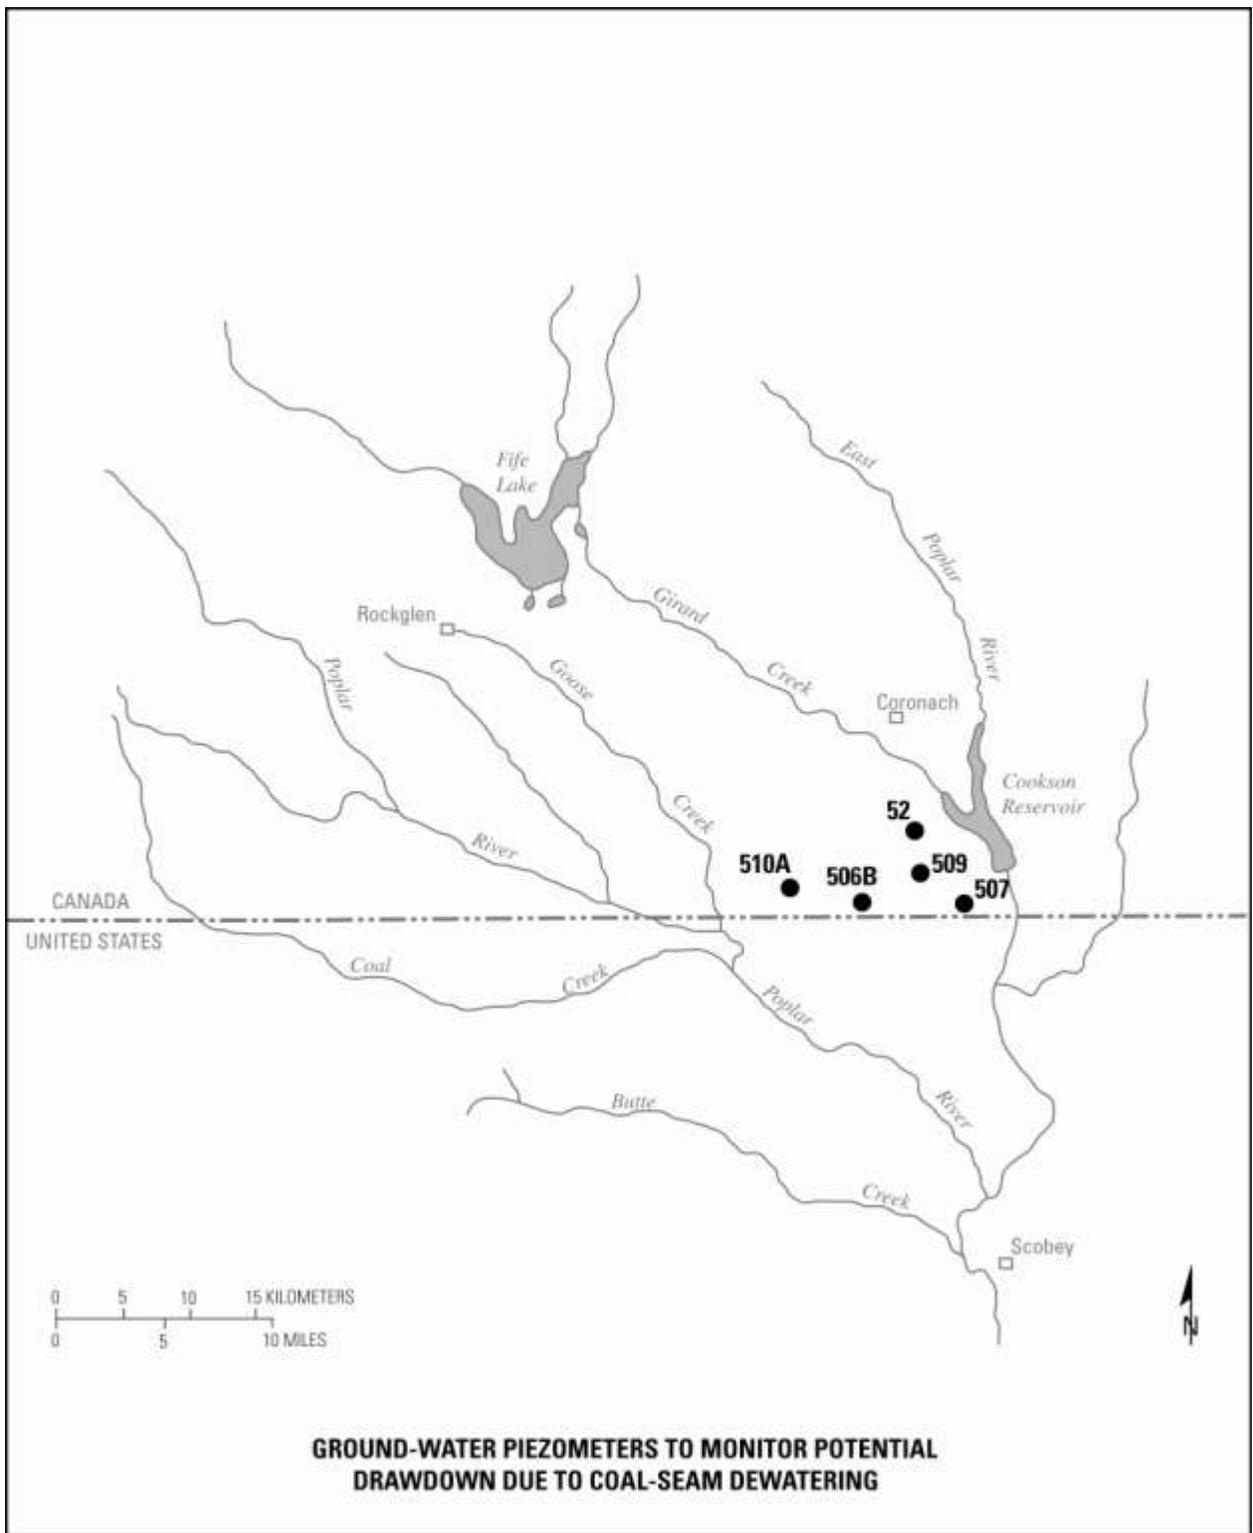

GROUNDWATER PIEZOMETER MONITORING POPLAR RIVER POWER STATION AREA--WATER LEVELS	
SPC Piezometer Number	Completion Formation
C525	Empress
C526	Empress
C527	Empress
C539	Empress
C540	Empress
C737	Empress
C739	Empress
C740	Empress
C741	Empress
C743	Empress
C756	Empress

GROUNDWATER PIEZOMETER MONITORING POPLAR RIVER POWER STATION AREA--WATER QUALITY	
SPC Piezometer Number	Completion Formation
C526	Empress
C540	Empress
C741	Empress

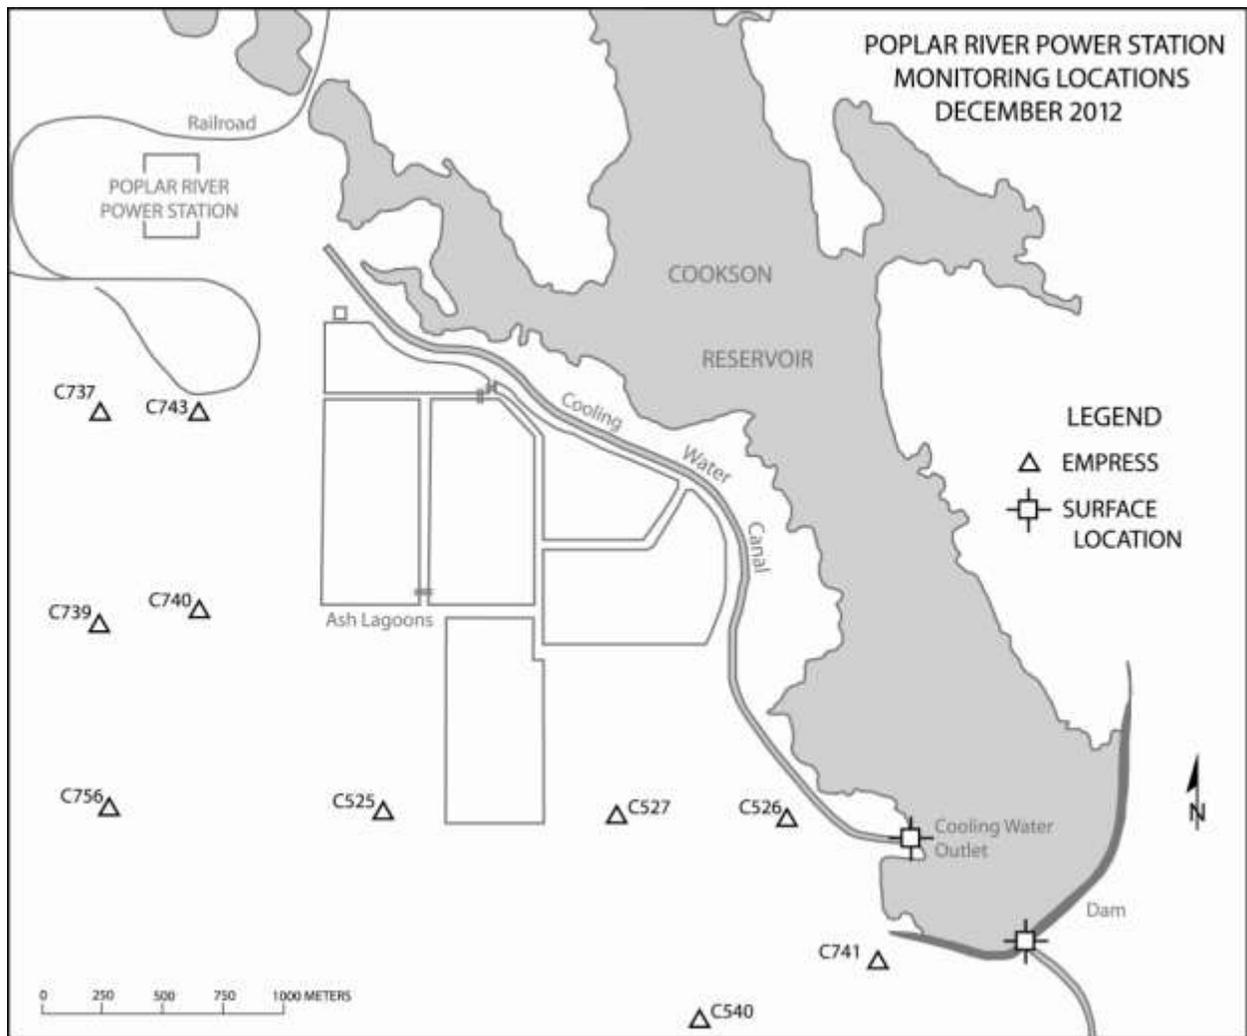


GROUNDWATER PIEZOMETER MONITORING ASH LAGOON AREA--WATER LEVEL	
SPC Piezometer Number	Completion Formation
C533	Empress
C534	Oxidized Till
C654	Unoxidized Till
C711	Oxidized Till
C712A	Unoxidized Till
C712B	Intra Till Sand
C712C	Mottled Till
C712D	Oxidized Till
C713	Oxidized Till
C714A	Unoxidized Till
C714B	Unoxidized Till
C714C	Oxidized Till
C714D	Oxidized Till
C714E	Empress
C715	Oxidized Till
C717	Oxidized Till
C720	Oxidized Till
C721	Oxidized Till
C722	Oxidized Till
C723	Oxidized Till
C725	Oxidized Till
C726B	Unoxidized Till
C726C	Oxidized Till
C726E	Empress
C728A	Oxidized Till
C728C	Mottled Till
C728D	Oxidized Till
C728E	Empress
C741	Empress
C742	Empress

GROUNDWATER PIEZOMETER MONITORING ASH LAGOON AREA--WATER LEVEL	
SPC Piezometer Number	Completion Formation
C758	Intra Till Sand
C763A	Mottled Till
C763B	Oxidized Till
C763D	Unoxidized Till
C763E	Empress

GROUNDWATER PIEZOMETER MONITORING ASH LAGOON AREA -- WATER QUALITY	
SPC Piezometer Number	Completion Formation
C533	Empress
C534	Oxidized Till
C654	Unoxidized Till
C711	Oxidized Till
C712A	Unoxidized Till
C712B	Intra Till Sand
C712C	Mottled Till
C712D	Oxidized Till
C713	Oxidized Till
C714A	Unoxidized Till
C714B	Unoxidized Till
C714C	Oxidized Till
C714D	Oxidized Till
C714E	Empress
C715	Oxidized Till
C717	Oxidized Till
C720	Oxidized Till
C721	Oxidized Till
C722	Oxidized Till
C723	Oxidized Till
C725	Oxidized Till
C726B	Unoxidized Till


GROUNDWATER PIEZOMETER MONITORING
ASH LAGOON AREA -- WATER QUALITY

SPC Piezometer Number	Completion Formation
C726C	Oxidized Till
C726E	Empress
C728A	Oxidized Till
C728C	Mottled Till
C728D	Oxidized Till
C728E	Empress
C741	Empress
C742	Empress
C758	Intra Till Sand
C763A	Mottled Till
C763B	Oxidized Till
C763D	Unoxidized Till
C763E	Empress

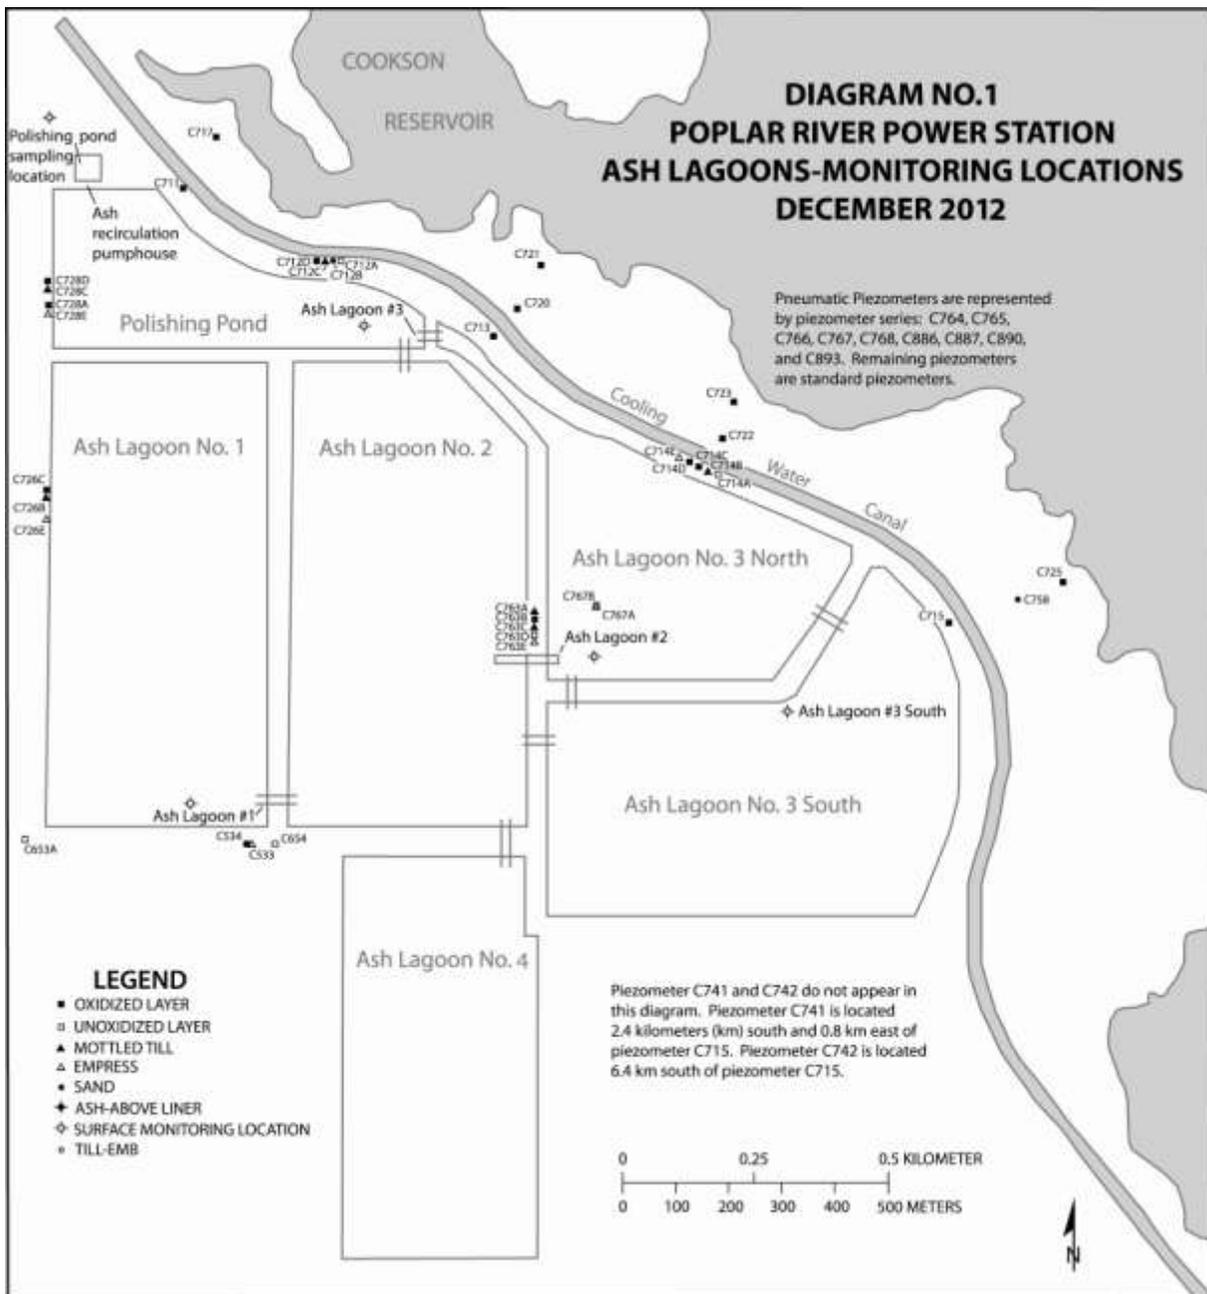

Ambient Air-Quality Monitoring

Responsible Agency: Saskatchewan Environment			
Data Collected by: SaskPower			
No. On Map	Location	Parameters	Reporting Frequency
1	Coronach (Discontinued)	Sulphur Dioxide Total Suspended Particulate	Continuous monitoring with hourly averages as summary statistics. 24-hour samples on 6-day cycle, corresponding to the national air pollution surveillance sampling schedule.
2	International Boundary	Sulphur Dioxide Total Suspended Particulate	Continuous monitoring with hourly averages as summary statistics. 24-hour samples on 6-day cycle, corresponding to the national air pollution surveillance sampling schedule.
3	Poplar River Power Station	Wind Speed and Direction	Continuous monitoring with hourly averages as summary statistics
METHODS			
Sulphur Dioxide		Saskatchewan Environment Pulsed fluorescence	
Total Suspended Particulate		Saskatchewan Environment High Volume Method	

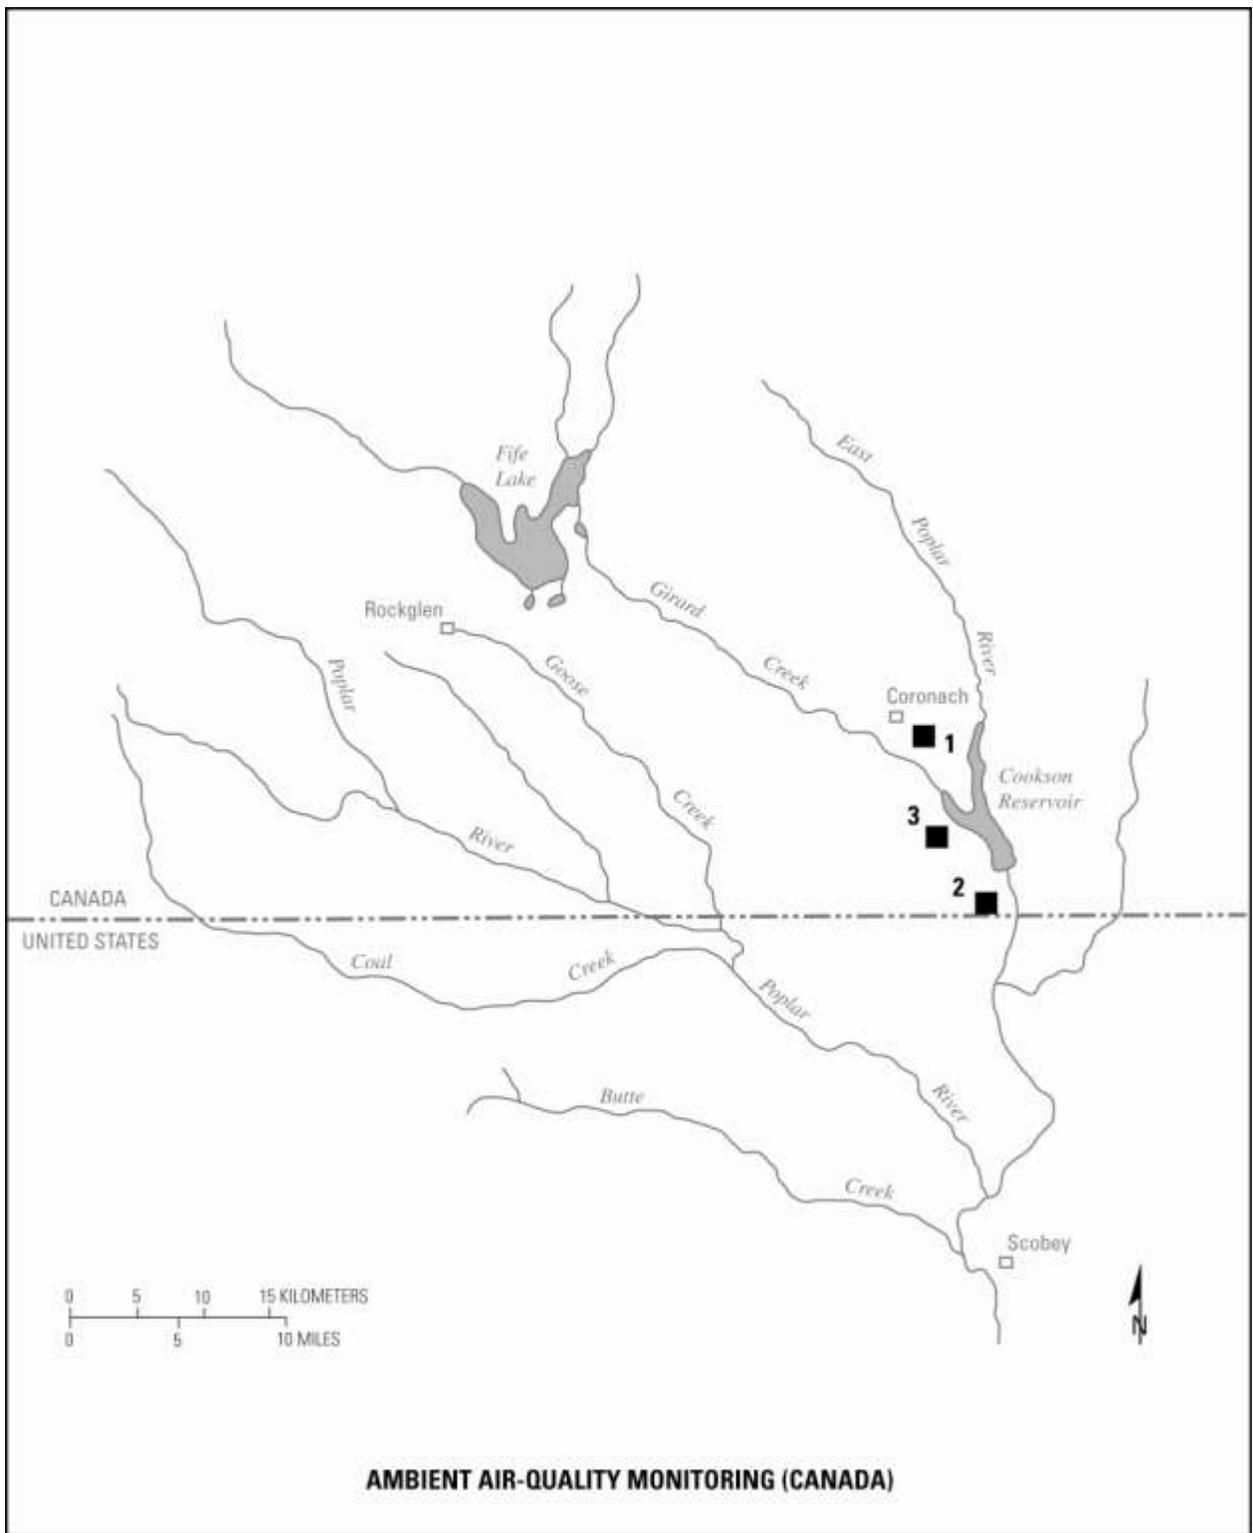

POPLAR RIVER

COOPERATIVE MONITORING ARRANGEMENT

TECHNICAL MONITORING SCHEDULES

2013


UNITED STATES

STREAMFLOW MONITORING

Responsible Agency: U.S. Geological Survey		
No. on Map	Station Number	Station Name
1*	06178000 (11AE008)	Poplar River at International Boundary
2*	06178500 (11AE003)	East Poplar River at International Boundary**

* International gauging station.

** Environment Canada assumed monitoring responsibility effective March 1, 2012.

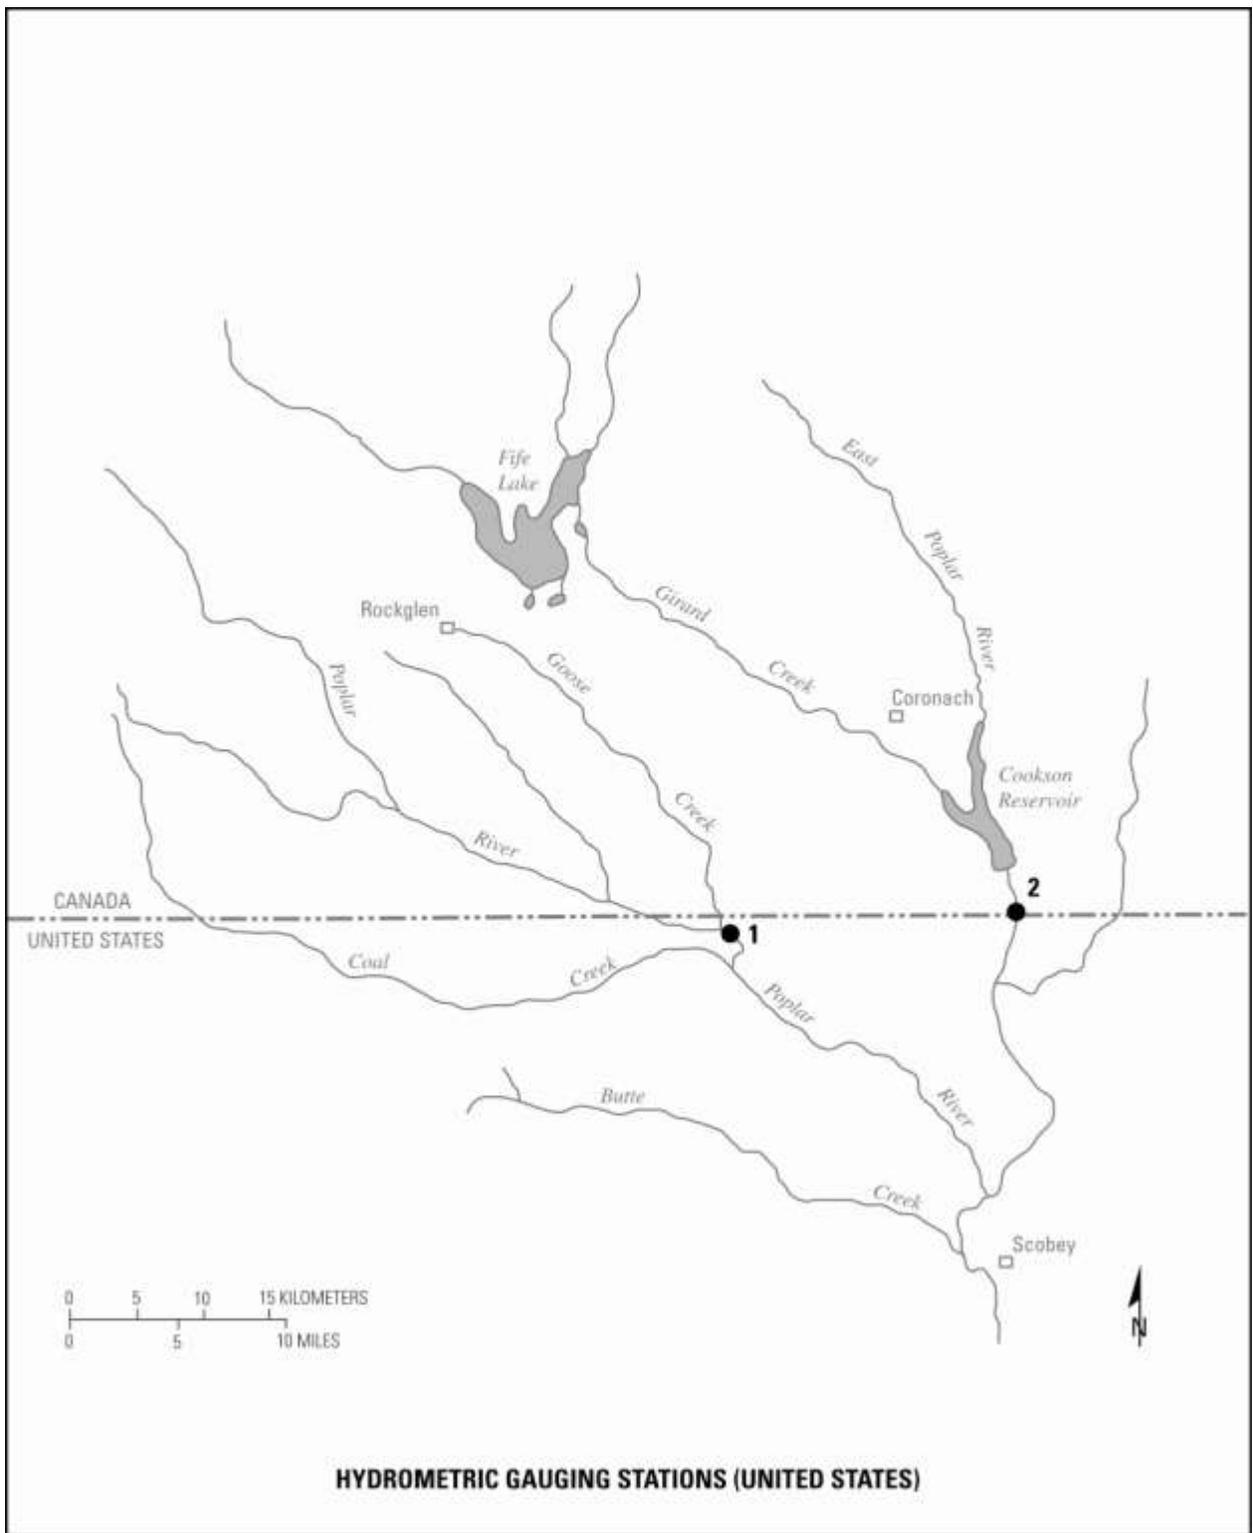

SURFACE-WATER-QUALITY MONITORING -- Station Locations


Responsible Agency: U.S. Geological Survey				
No. On Map	USGS Station No.	STATION NAME		
1	06178000	Poplar River at International Boundary		
2	06178500	East Poplar River at International Boundary		
PARAMETERS				
			Annual Sampling Frequency	
Analytical Code	Parameter	Analytical Method	Site 1*	Site 2**
29801	Alkalinity - lab	Fixed endpoint Titration	SUS	SUS
00608	Ammonia - diss	Colorimetric	SUS	SUS
01002	Arsenic - tot	ICP, MS	SUS	SUS
00025	Barometric pressure	Barometer, field	SUS	SUS
01020	Boron - diss	ICP	SUS	SUS
01027	Cadmium - tot/rec	ICP, MS	SUS	SUS
00915	Calcium - diss	ICP, AES	SUS	SUS
00940	Chloride - diss	IC	SUS	SUS
00095	Conductivity	Electrometric, field	SUS	SUS
00061	Discharge - inst	Direct measurement	SUS	SUS
00900	Hardness	Calculated	SUS	SUS
00950	Fluoride - diss	ISE	SUS	SUS
01051	Lead - tot/rec	ICP, MS	SUS	SUS
00925	Magnesium - diss	ICP	SUS	SUS
00613	Nitrate - diss	Colorimetric	SUS	SUS
00631	Nitrate + Nitrite - diss	Colorimetric	SUS	SUS
62855	Nitrogen, total	Colorimetric	SUS	SUS
00300	Oxygen-diss	Oxygen membrane, field	SUS	SUS
00400	pH	Electrometric, field	SUS	SUS
00671	Phos, Ortho-diss	Colorimetric	SUS	SUS
00665	Phosphorous - tot	Colorimetric	SUS	SUS
00935	Potassium - diss	ICP, AES	SUS	SUS
00931	SAR	Calculated	SUS	SUS
80154	Sediment - conc.	Filtration-Gravimetric	SUS	SUS
70331	Sediment - %<.063mm	Sieve	SUS	SUS
80155	Sediment - load	Calculated	SUS	SUS
00955	Silica - diss	ICP, AES	SUS	SUS
00930	Sodium - diss	ICP, AES	SUS	SUS
00945	Sulphate - diss	IC	SUS	SUS
70301	Total Dissolved Solids	Calculated	SUS	SUS
00010	Temp Water	Stem Thermometer	SUS	SUS
00020	Temp Air	Stem Thermometer	SUS	SUS
01092	Zinc - tot/rec	ICP, MS	SUS	SUS

Samples collected obtained during the monthly periods:

* -- March - April; May; June; July - September

** -- May; June; July; August - September

Abbreviations: AES - atomic emission spectroscopy; **conc.** - concentration; **diss** - dissolved; **IC** - ion exchange chromatography; **ICP** - inductively coupled plasma; **ISE** - ion-selective electrode; **MS** - mass spectroscopy ; **Org** - organic; **phos.** - phosphate; **SAR** - sodium adsorption ratio; **SUS** - sampling suspended; **tot** - total; **tot/rec** - total recoverable

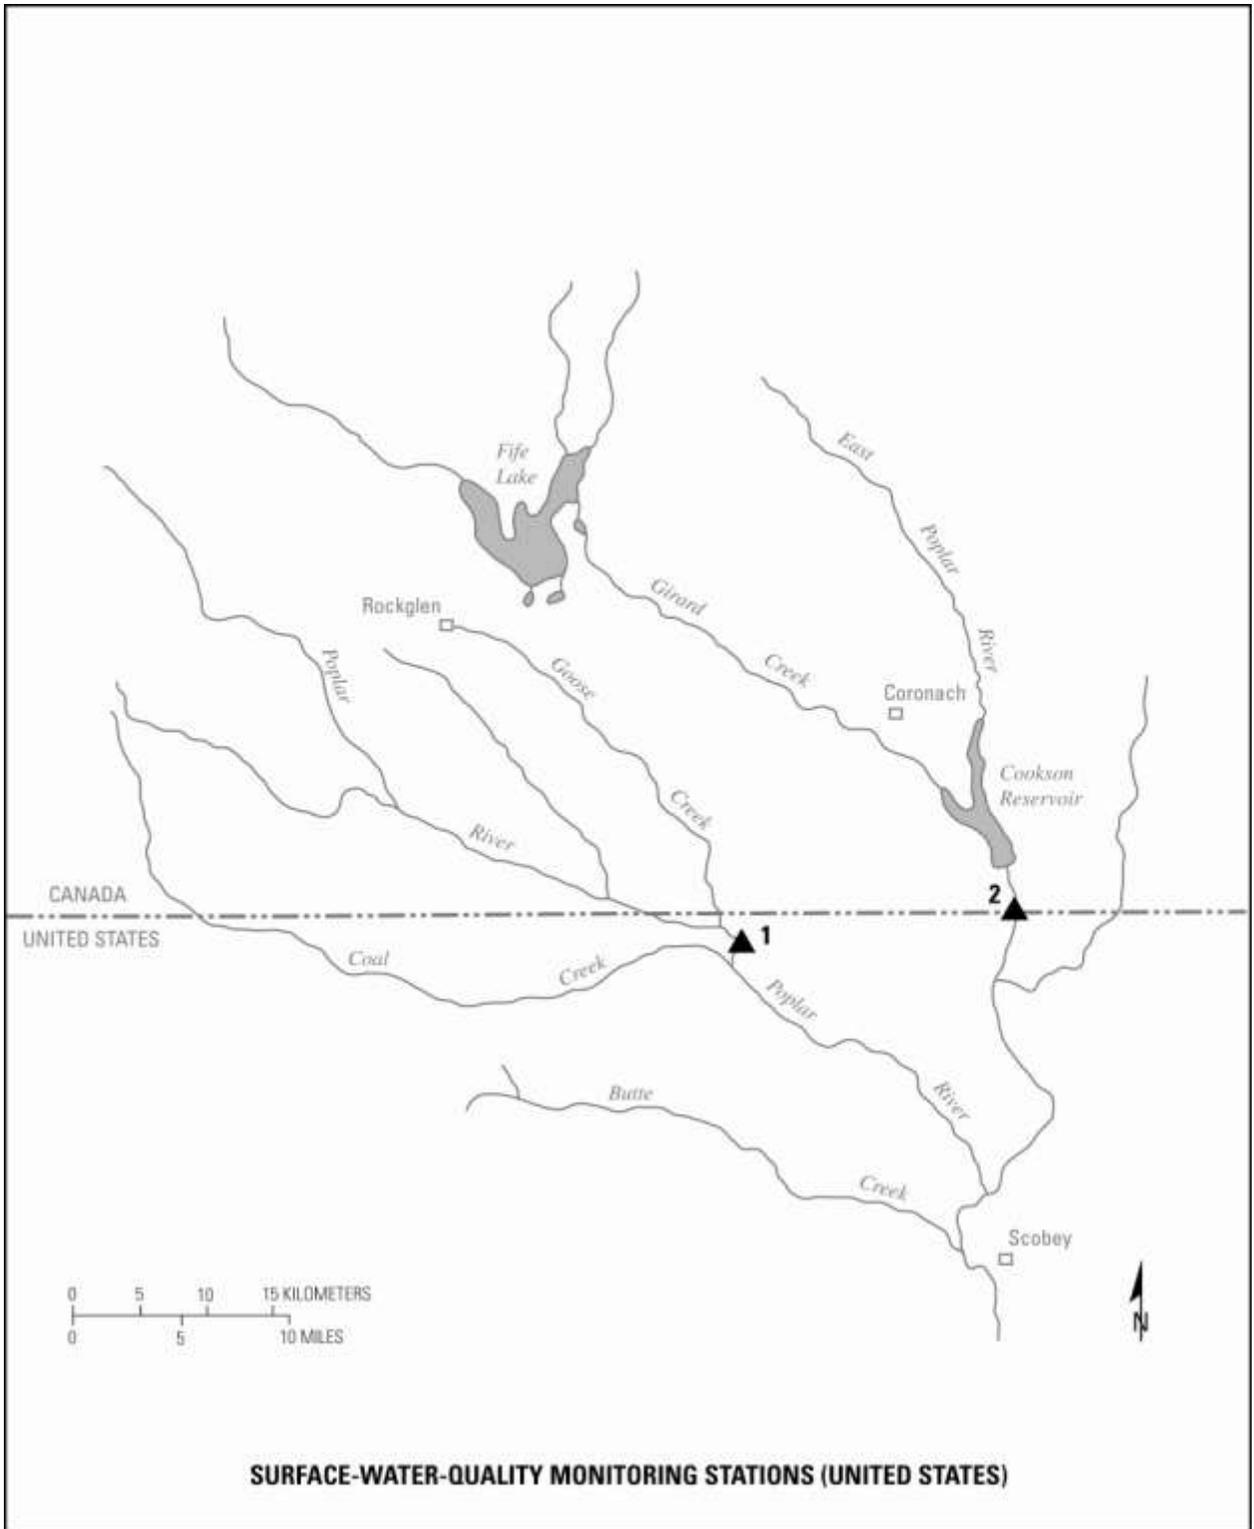

GROUND-WATER-QUALITY MONITORING -- Station Locations


Map Number	Well Location	Total Depth (m)	Casing Diameter (cm)	Aquifer	Perforation Zone (m)
7	37N47E12BBBB	44.1	10.2	Hart Coal	39-44
16	37N46E3ABAB	25.5	10.2	Fort Union	23-25
24	37N48E5AB	9.6	10.2	Alluvium	9.2-9.6

Parameters

Storet ** Code	Parameter	Analytical Method	Sampling Frequency Station No.
0041001106	Alkalinity	Calculated	Sample collection is annually for all locations identified above. The analytical method descriptions are those of the Montana Bureau of Mines and Geology Laboratory where the samples are analyzed.
01095	Aluminum dissolved	ICP or ICP-MS	
50250	Antimony dissolved	ICP or ICP-MS	
01005	Arsenic dissolved	ICP or ICP-MS	
01010	Barium dissolved	ICP or ICP-MS	
00440	Beryllium dissolved	ICP or ICP-MS	
01020	Bicarbonates	Electrometric Titration	
82298	Boron-diss	Emission Plasma, ICP	
01025	Bromide	Ion Chromatography	
00915	Cadmium,dissolved	ICP or ICP-MS	
00445	Calcium	Emission Plasma	
00940	Carbonates	Electrometric Titration	
01030	Chloride	Ion Chromatography	
01035	Chromium, dissolved	ICP or ICP-MS	
00095	Cobalt, dissolved	ICP or ICP-MS	
01040	Conductivity	Wheatstone Bridge	
00950	Copper, dissolved	ICP or ICP-MS	
09000	Fluoride	Ion Chromatography	
01046	Hardness	Calculated	
01049	Iron-diss	Emission Plasma, ICP	
01130	Lead-diss	Emission Plasma, ICP	
00925	Lithium-diss	Emission Plasma, ICP	
01056	Magnesium	Emission Plasma, ICP	
01060	Manganese-diss	Emission Plasma, ICP	
01065	Molybdenum	Emission Plasma, ICP-MS	
00630	Nickel, dissolved	ICP or ICP-MS	
00671	Nitrate	Ion Chromatography	
00400	Orthophosphate	Ion Chromatography	
00935	pH	Electrometric	
00931	Potassium	Emission Plasma, ICP	
01145	SAR	Calculated	
00955	Selenium-diss	ICP-MS	
01075	Silica	Emission Plasma, ICP-MS	
00930	Silver, dissolved	ICP-MS	
01080	Sodium	Emission Plasma, ICP	
00445	Strontium-diss	Emission Plasma, ICP	
01057	Sulphate	Ion Chromatography	
01150	Thallium, dissolved	ICP or ICP-MS	
28011	Titanium, dissolved	ICP or ICP-MS	
01085	Uranium, dissolved	ICP-MS	
00190	Vanadium, dissolved	ICP or ICP-MS	
01160	Zinc-diss	Emission Plasma, ICP	
*	Zirconium, dissolved	ICP or ICP-MS	
70301	Sum of diss. Constituents	Calculated	
	TDS	Calculated	


SYMBOLS:

** - Computer storage and retrieval system -- EPA ICP – Inductively Coupled Plasma Unit
 cm – centimetre ICP – MS – Inductively Coupled Plasma – Mass Spectrometry diss – dissolved m – metre

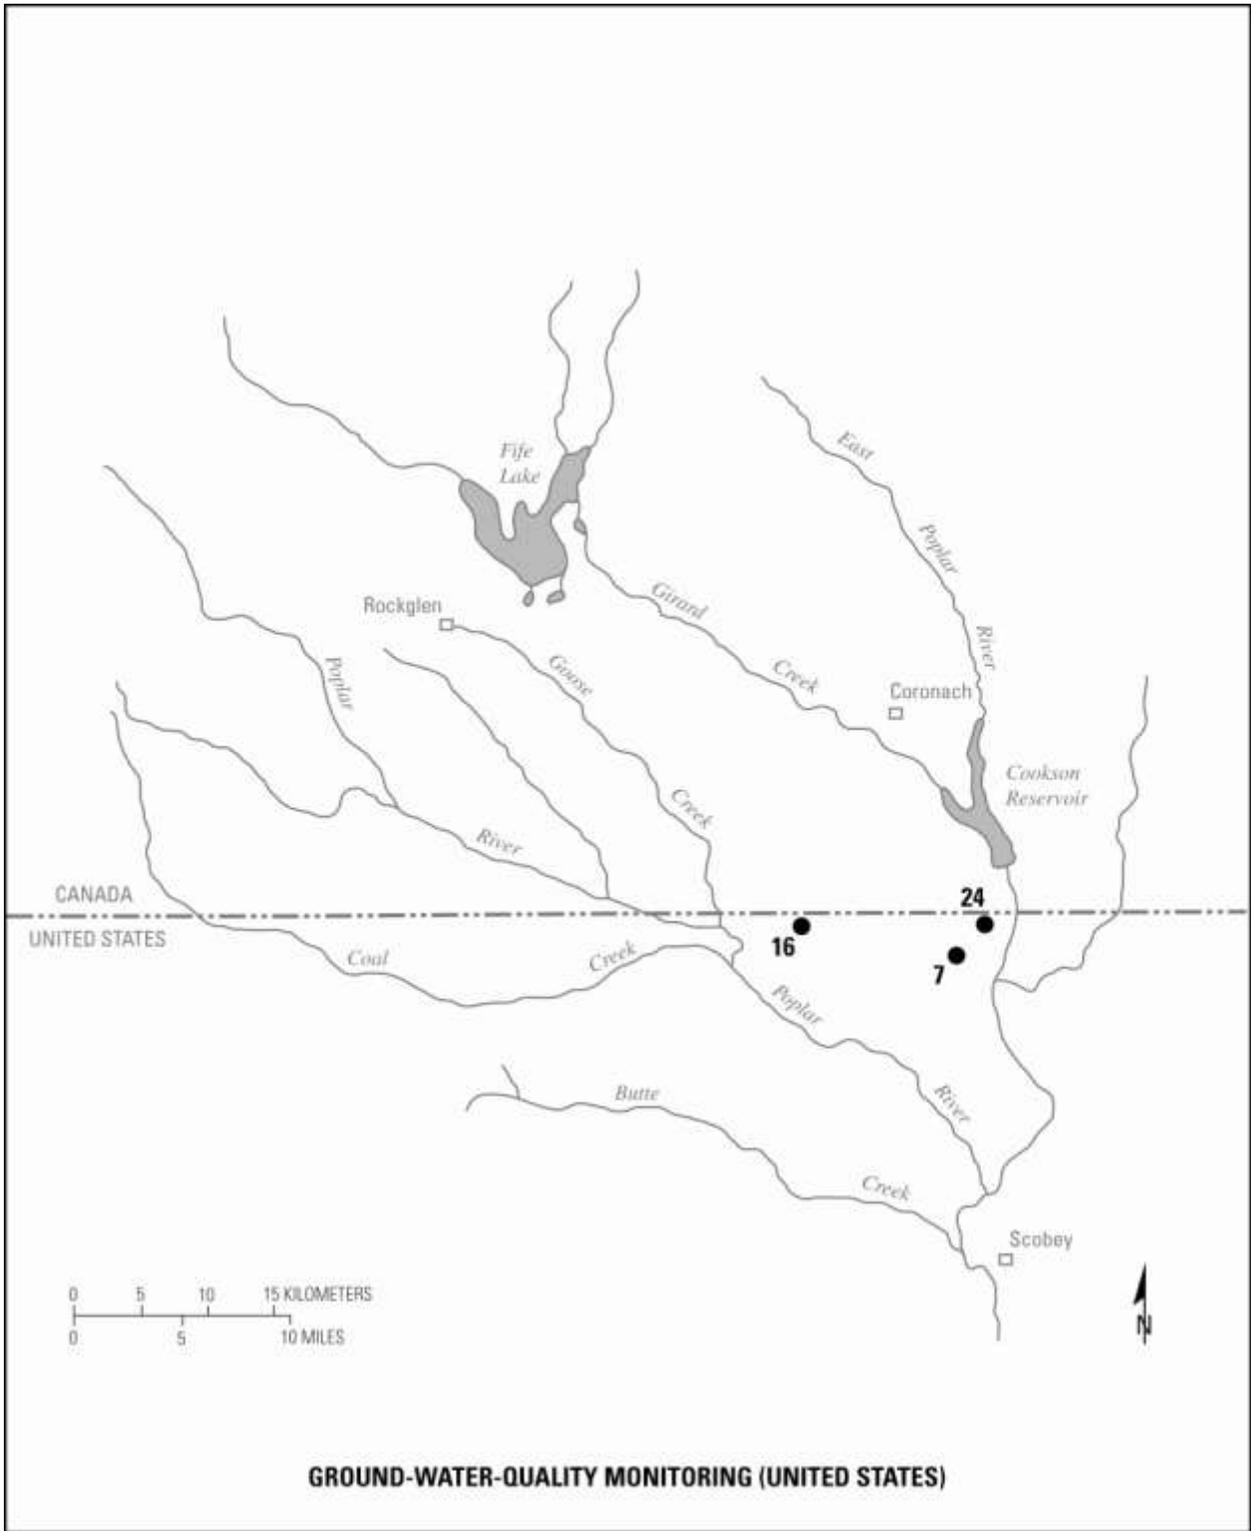

**GROUNDWATER LEVELS TO MONITOR POTENTIAL
DRAWDOWN DUE TO COAL-SEAM DEWATERING**

Responsible Agency: Montana Bureau of Mines and Geology		
No. on Map	Montana Ground Water Information Center ID No.	Sampling
5	GWIC ID 4321	Determine water levels quarterly
6	GWIC ID 4227	Determine water levels quarterly
7	GWIC ID 4267	Determine water levels quarterly
8	GWIC ID 4287	Determine water levels quarterly
9	GWIC ID 4274	Determine water levels quarterly
10	GWIC ID 4340	Determine water levels quarterly
11	GWIC ID 4329	Determine water levels quarterly
13	GWIC ID 4248	Determine water levels quarterly
16	GWIC ID 4211	Determine water levels quarterly
17	GWIC ID 4297	Determine water levels quarterly
19	GWIC ID 4290	Determine water levels quarterly
22	GWIC ID 4261	Determine water levels quarterly
23	GWIC ID 124105	Determine water levels quarterly
24	GWIC ID 144835	Determine water levels quarterly

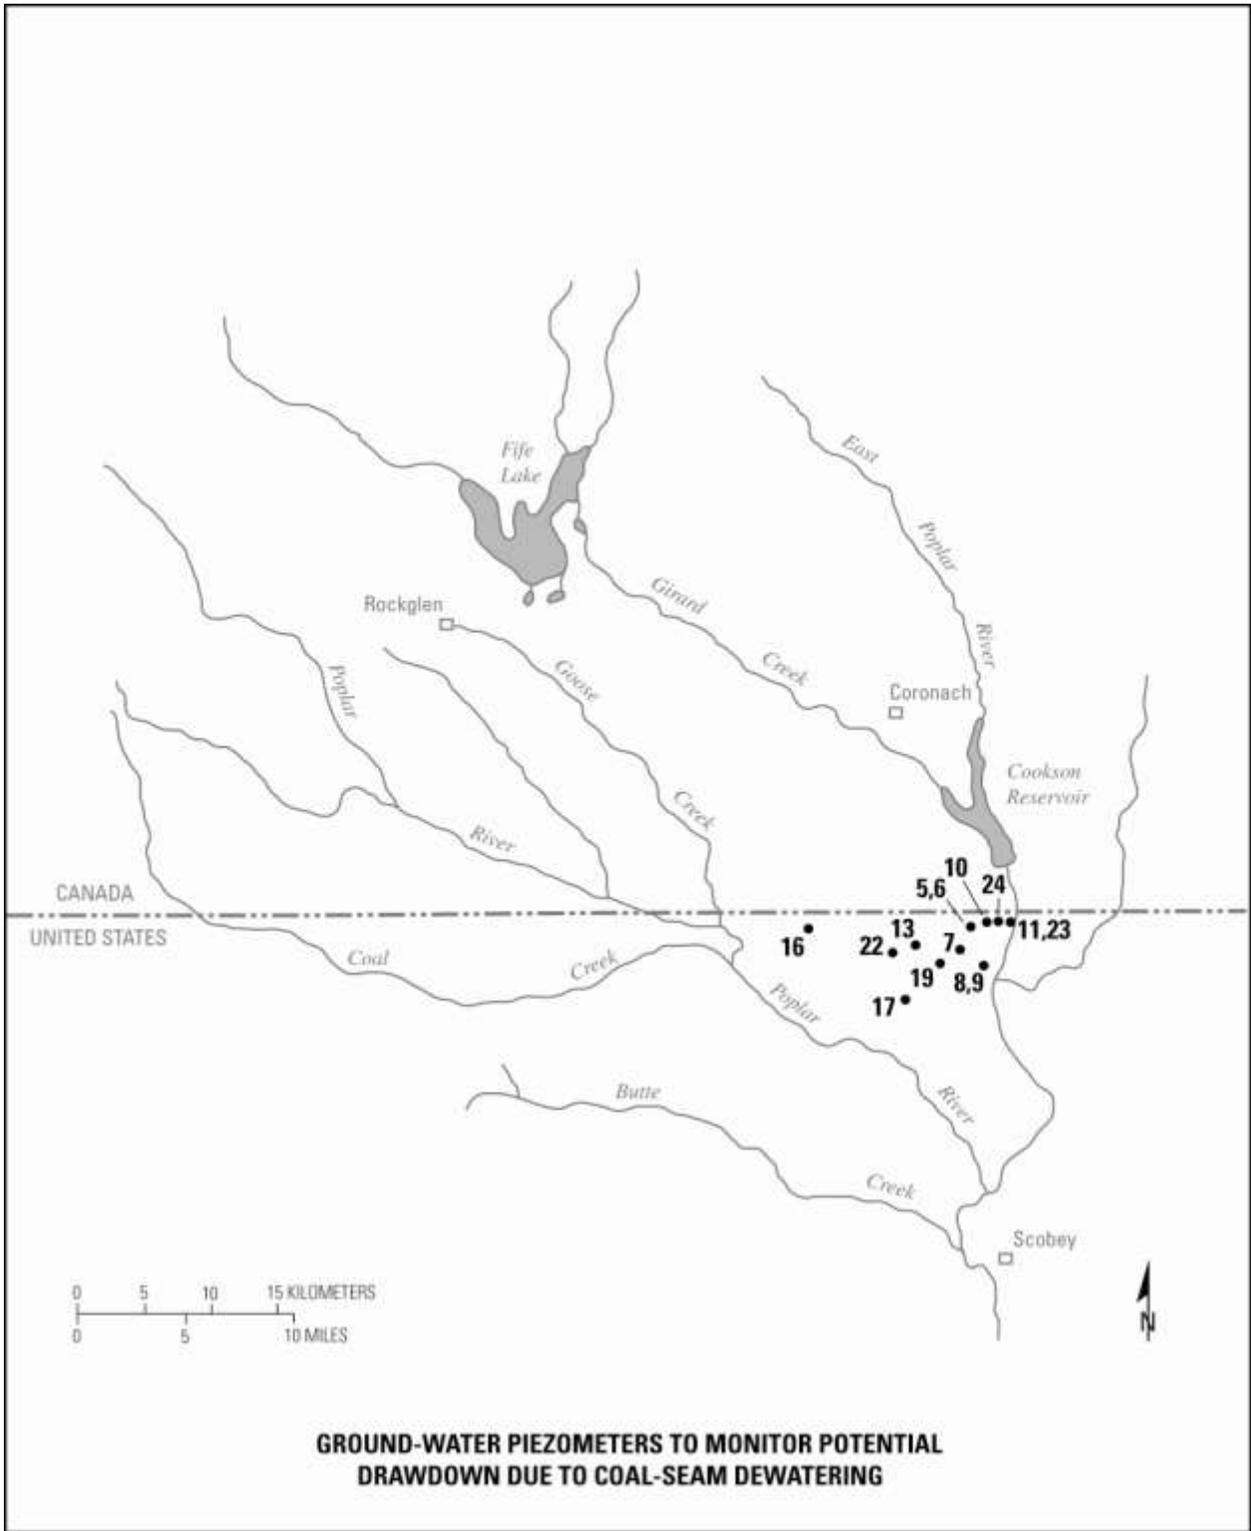

ANNEX 3

**RECOMMENDED FLOW APPORTIONMENT
IN THE POPLAR RIVER BASIN
BY THE INTERNATIONAL SOURIS-RED RIVERS ENGINEERING BOARD,
POPLAR RIVER TASK FORCE (1976)**

***RECOMMENDED FLOW APPORTIONMENT
IN THE POPLAR RIVER BASIN**

The aggregate natural flow of all streams and tributaries in the Poplar River Basin crossing the International Boundary shall be divided equally between Canada and the United States subject to the following conditions:

1. The total natural flow of the West Fork Poplar River and all its tributaries crossing the International Boundary shall be divided equally between Canada and the United States but the flow at the International Boundary in each tributary shall not be depleted by more than 60 percent of its natural flow.
2. The total natural flow of all remaining streams and tributaries in the Poplar River Basin crossing the International Boundary shall be divided equally between Canada and the United States. Specific conditions of this division are as follows:
 - (a) Canada shall deliver to the United States a minimum of 60 percent of the natural flow of the Middle Fork Poplar River at the International Boundary, as determined below the confluence of Goose Creek and Middle Fork.
 - (b) The delivery of water from Canada to the United States on the East Poplar River shall be determined on or about the first day of June of each year as follows:
 - (i) When the total natural flow of the Middle Fork Poplar River, as determined below the confluence of Goose Creek, during the immediately preceding March 1st to May 31st period does not exceed 4,690 cubic decameters (3,800 acre-feet), then a continuous minimum flow of 0.028 cubic metres per second (1.0 cubic foot per second) shall be delivered to the United States on the East Poplar River at the International Boundary throughout the succeeding 12 month period commencing June 1st. In addition, a volume of 370 cubic decameters (300 acre-feet) shall be delivered to the United States upon demand at any time during the 12 month period commencing June 1st.
 - (ii) When the total natural flow of the Middle Fork Poplar River, as determined below the confluence of Goose Creek, during the immediately preceding March 1st to May 31st period is greater than 4,690 cubic decameters (3,800 acre-feet), but does not exceed 9,250 cubic decameters (7,500 acre-feet),

* Canada-United States, 1976, Joint studies for flow apportionment, Poplar River Basin, Montana-Saskatchewan: Main Report, International Souris-Red Rivers Board, Poplar River Task Force, 43 pp.

then a continuous minimum flow of 0.057 cubic metres per second (2.0 cubic feet per second) shall be delivered to the United States on the East Poplar River at the International Boundary during the succeeding period June 1st through August 31st. A minimum delivery of 0.028 cubic metres per second (1.0 cubic feet per second) shall then be maintained from September 1st through to May 31st of the following year. In addition, a volume of 617 cubic decameters (500 acre-feet) shall be delivered to the United States upon demand at any time during the 12-month period commencing June 1st.

- (iii) When the total natural flow of the Middle Fork Poplar River, as determined below the confluence of Goose Creek, during the immediately preceding March 1st to May 31st period is greater than 9,250 cubic decameters (7,500 acre-feet), but does not exceed 14,800 cubic decameters (12,000 acre-feet), then a continuous minimum flow of 0.085 cubic metres per second (3.0 cubic feet per second) shall be delivered to the United States on the East Poplar River at the International Boundary during the succeeding period June 1st through August 31st. A minimum delivery of 0.057 cubic metres per second (2.0 cubic feet per second) shall then be maintained from September 1st through to May 31st of the following year. In addition, a volume of 617 cubic decameters (500 acre-feet) shall be delivered to the United States upon demand at any time during the 12 month period commencing June 1st.
- (iv) When the total natural flow of the Middle Fork Poplar, as determined below the confluence of Goose Creek, during the immediately preceding March 1st to May 31st period exceeds 14,800 cubic decameters (12,000 acre-feet) then a continuous minimum flow of 0.085 cubic metres per second (3.0 cubic feet per second) shall be delivered to the United States on the East Poplar River at the International Boundary during the succeeding period June 1st through August 31st. A minimum delivery of 0.057 cubic metres per second (2.0 cubic feet per second) shall then be maintained from September 1st through to May 31st of the following year. In addition, a volume of 1,230 cubic decameters (1,000 acre-feet) shall be delivered to the United States upon demand at any time during the 12-month period commencing June 1st.
- (c) The natural flow at the International Boundary in each of the remaining individual tributaries shall not be depleted by more than 60 percent of its natural flow.

- 3. The natural flow and division periods for apportionment purposes shall be determined, unless otherwise specified, for periods of time commensurate with the uses and requirements of both countries.

ANNEX 4

CONVERSION FACTORS

CONVERSION FACTORS

ac	=	4,047 m ³ = 0.04047 ha
ac-ft	=	1,233.5 m ³ = 1.2335 dam ³
°C	=	5/9(°F-32)
cm	=	0.3937 in.
cm ²	=	0.155 in ²
dam ³	=	1,000 m ³ = 0.8107 ac-ft
ft ³	=	28.3171 x 10 ⁻³ m ³
ha	=	10,000 m ² = 2.471 ac
hm	=	100 m = 328.08 ft
hm ³	=	1 x 10 ⁶ m ³
I. gpm	=	0.0758 L/s
in	=	2.54 cm
kg	=	2.20462 lb = 1.1 x 10 ⁻³ tons
km	=	0.62137 miles
km ²	=	0.3861 mi ²
L	=	0.3532 ft ³ = 0.21997 I. gal = 0.26420 U.S. gal
L/s	=	0.035 cfs = 13.193 I. gpm = 15.848 U.S. gpm
m	=	3.2808 ft
m ²	=	10.765 ft ²
m ³	=	1,000 L = 35.3144 ft ³ = 219.97 I. gal= 264.2 U.S. gal
m ³ /s	=	35.314 cfs
mm	=	0.00328 ft
tonne	=	1,000 kg = 1.1023 ton (short)
U.S. gpm	=	0.0631 L/s

For Air Samples

$$\text{ppm} = 100 \text{ pphm} = 1000 \times (\text{Molecular Weight of substance}/24.45) \text{ mg/m}^3$$